

0708N (.070" x .080")

0708N (.070" x .080")




◆ 0708N Capacitance & Rated Voltage Table

Cap. pF	Code	Tol.	Rated WVDC	Cap. pF	Code	Tol.	Rated WVDC	Cap. pF	Code	Tol.	Rated WVDC
1.0	1R0	B,C	500V Code 501	3.9	3R9	B,C	500V Code 501	22	220	G,J	500V Code 501
1.1	1R1			4.3	4R3			24	240		
1.2	1R2			4.7	4R7			27	270		
1.3	1R3			5.1	5R1			30	300		
1.4	1R4			5.6	5R6			33	330		
1.5	1R5			6.2	6R2			36	360		
1.6	1R6			6.8	6R8			39	390		
1.7	1R7			7.5	7R5			43	430		
1.8	1R8			8.2	8R2			47	470		
1.9	1R9			9.1	9R1	51		510			
2.0	2R0			10	100	56		560			
2.1	2R1			11	110	62		620			
2.2	2R2			12	120	68		680			
2.4	2R4			13	130	75		750			
2.7	2R7			15	150	82		820			
3.0	3R0			16	160	91		910			
3.3	3R3			18	180	100		101			
3.6	3R6			20	200						

Remark: special capacitance, tolerance and WVDC are available, consult with PASSIVE PLUS.


◆ Part Numbering

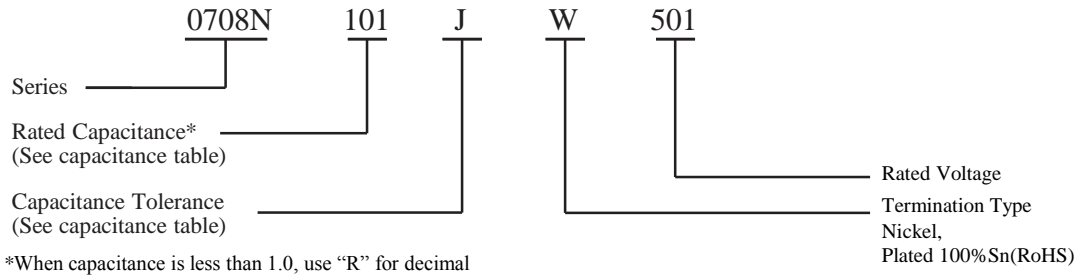

Capacitance Tolerance						
Code	B	C	D	G	J	K
Tol.	±0.1pF	±0.25pF	±0.5pF	±2%	±5%	±10%

◆ 0708N Chip Dimensions

unit:inch(millimeter)

Series	Term. Code	Type/Outlines	Capacitor Dimensions				Plated Material
			Length Lc	Width Wc	Thickness Tc	Overlap B	
0708N	W	 Chip	.070±0.015 (1.78 ±0.38)	.080±.010 (2.03±0.25)	.115 (2.92)max	0.020±.010 (0.50±0.25)	Sn/Ni (RoHS)

Note: When horizontally mounted, the electrodes are in vertical position



◆ Performance

Item	Specifications
Quality Factor (Q)	2,000 min.
Insulation Resistance (IR)	10 ⁵ Megohms min. @ +25 °C at rated WVDC. 10 ⁴ Megohms min. @ +125 °C at rated WVDC.
Rated Voltage	See Capacitance Table
Dielectric Withstanding Voltage (DWV)	250% of Voltage for 5 seconds, Rated Voltage ≤ 500VDC
Operating Temperature Range	-55°C to +175°C
Temperature coefficient (TC)	0 ± 30ppm/°C
Capacitance Drift	± 0.02% or ± 0.02pF, whichever is greater.
Piezoelectric Effects	None


◆ Environmental Tests

Item	Specifications	Method
Terminal Adhesion	Termination should not pull off. Ceramic should remain undamaged.	Linear pull force exerted on axial leads soldered to each terminal. 2.0lbs.
Resistance To soldering heat	No mechanical damage Capacitance change: -1.0% ~+2.0% Q>500 I.R. >10 G Ohms Breakdown voltage: 2.5 x WVDC	Preheat device to 150°C -180°C for 60 sec. Dip in 260°C ± 5°C solder for 10 ± 1 sec. Measure after 24 ± 2 hour cooling period.
Thermal Shock	No mechanical damage Capacitance change: ± 0.5% or 0.5pF max Q>500 I.R. >10 G Ohms Breakdown voltage: 2.5 x WVDC	MIL-STD-202, Method 107, Condition A. At the maximum rated temperature (-55°C and 175°C) stay 30 minutes. The time of removing shall not be more than 3 minutes. Perform the five cycles.
Humidity, Steady State	No mechanical damage Capacitance change: ± 0.5% or 0.5pF max. Q>300 I.R. >1 G Ohms Breakdown voltage: 2.5 x WVDC	MIL-STD-202, Method 106.
Low Voltage Humidity	No mechanical damage Capacitance change: ± 0.3% or 0.3pF max. Q>300 I.R. >1 G Ohms Breakdown voltage: 2.5 x WVDC	MIL-STD-202, Method 103, Condition A, with 1.5 Volts D.C. applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours minimum.
Life	No mechanical damage Capacitance change: ± 2.0% or 0.5pF max. Q>500 I.R. >1 G Ohms Breakdown voltage: 2.5 x WVDC	MIL-STD-202, Method 108, for 1000 hours, at 175 °C. 200% of Voltage for Capacitors, Rated Voltage ≤ 500VDC

◆ 0708N Electrical Performance Curves

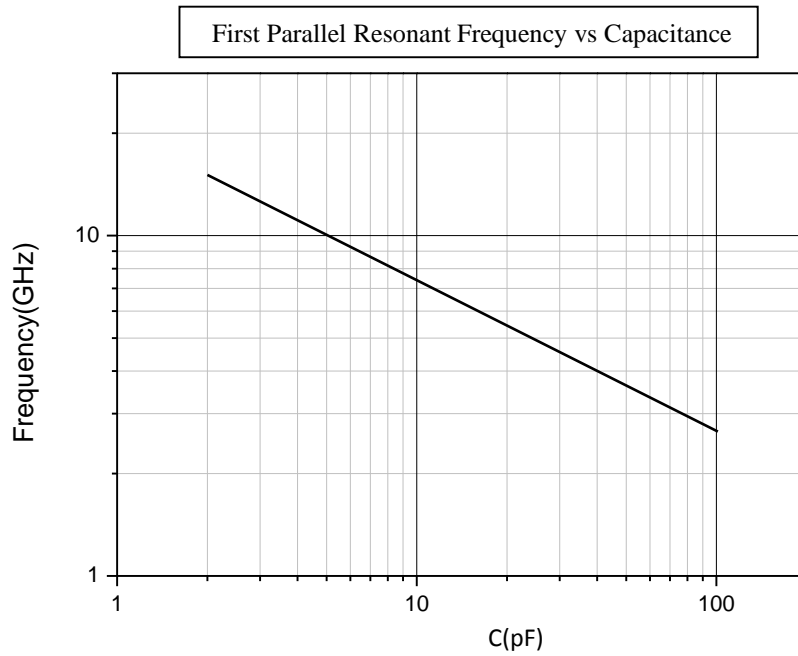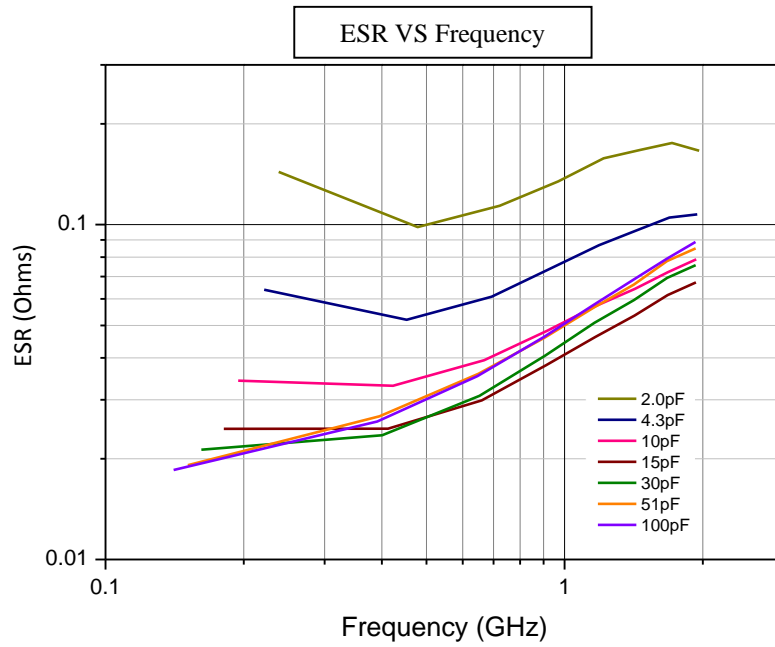

◆ 0708N Electrical Performance Curves

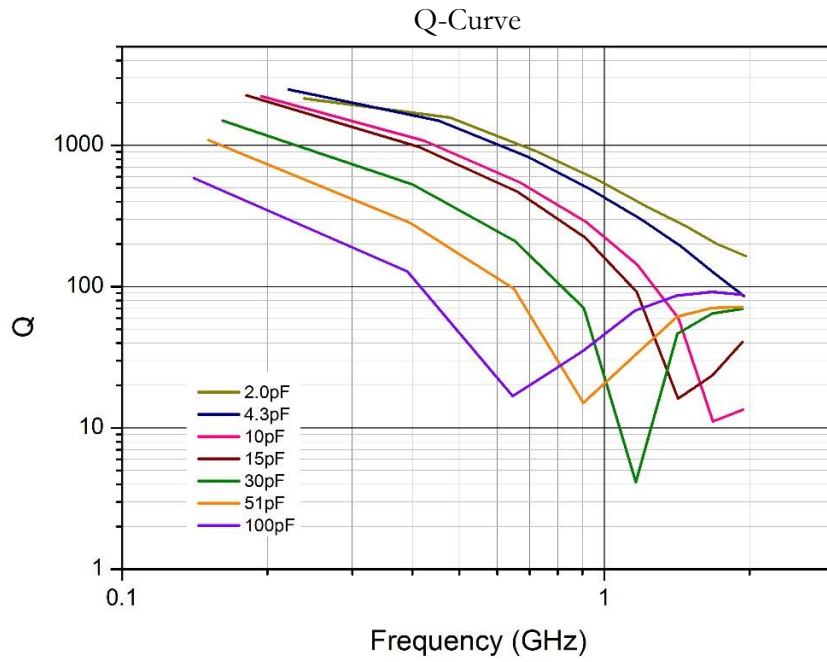


◆ **Recommended Land Pattern Dimensions**

When mounting the capacitor to substrate, it's important to carefully consider that the amount of solder (size of fillet) used has a direct effect upon the capacitor once it's mounted.

- 1) The greater the amount of solder, the greater the stress to the elements. This may cause the substrate to break or crack.
- 2) In the situation where two or more devices are mounted onto a common land, be sure to separate the device into exclusive pads by using soldering resist.

● **Horizontal Mounting**

Orientation	EIA	A	B	C
Horizontal	0708	0.90	1.00	2.90

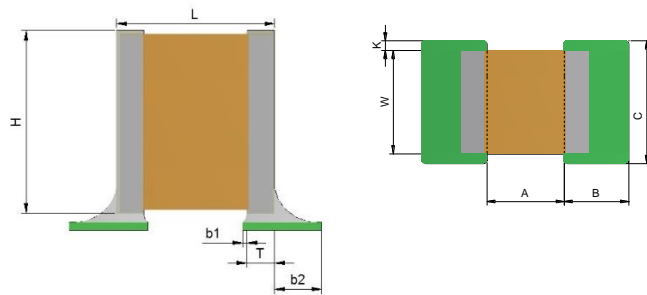

◆ **Tape & Reel Specifications**

Orientation	EIA	A0	B0	K0	W	P0	P1	T	F	QTY Min	QTY/ REEL	Tape Material
Horizontal	0708N	2.30	3.60	2.70	8.00	4.00	4.00	0.254	3.50	500	500	Paper

● **Horizontal Orientation**

