




Spiral Inductors

PPI Spiral Inductors consist of a thin film gold spiral patterned on a substrate for use in a wide variety of uses, including storing electrical energy in the form of magnetic energy, in frequencies from DC to RF.

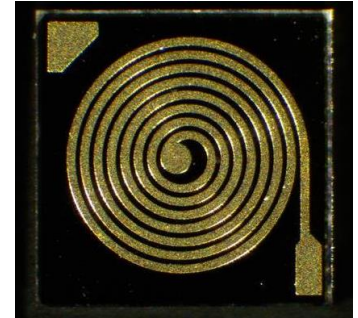

50x50 Spiral Inductor

An optional polyimide coating over the coil is available for increased resistance to scratches or shorts. Non-conductive epoxy is recommended as a mounting method, backside metallization is also available. A second corner pad is provided for easy wire-bonding from the center pad for edge-contact mounting.

Product Features

- High Thermal Conductivity
- Low Thermal Resistance
- Low Capacitance
- Less Resistive & Capacitive losses
- RoHS Compliant
- EIA case sizes
- More efficient thermal management


Applications

- Microwave Circuit Resonant elements
- Electrical Power & Electronic Devices

Functional Applications

- Choking, Blocking, Attenuating, or filtering/smoothing high frequency noise
- Storing & transferring energy in power converters
- Creates tuned oscillators or LC “tank” circuits
- Impedance matching


Part Numbering

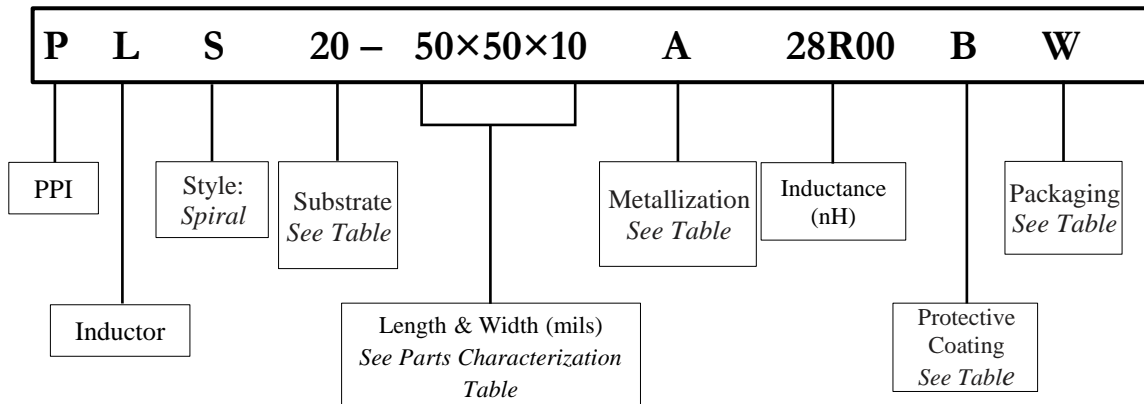

Other inductance values, DC resistance values, substrates, geometries, metallizations, and custom inductors are available.

Parts Characterizations

| Case Size (Mils) | Inductances | # of Turns | DC Resistance | Q (@ 200MHz) | Q (@ 500MHz) |
|------------------|-------------|------------|---------------|--------------|--------------|
| 25 x 25 | 1.2 nH | 1.5 | 0.6Ω | 3 | 7 |
| 25 x 25 | 2.0 nH | 2.0 | 0.9Ω | 3 | 8 |
| 25 x 25 | 3.0 nH | 2.5 | 1.2Ω | 4 | 9 |
| 30 x 30 | 4.4 nH | 3.0 | 1.5Ω | 4 | 10 |
| 30 x 30 | 6.0 nH | 3.5 | 1.9Ω | 4 | 11 |
| 30 x 30 | 7.9 nH | 4.0 | 2.3Ω | 4 | 11 |
| 40 x 40 | 10 nH | 4.5 | 2.7Ω | 5 | 12 |
| 40 x 40 | 13 nH | 5.0 | 3.2Ω | 5 | 12 |
| 40 x 40 | 16 nH | 5.5 | 3.7Ω | 5 | 13 |
| 40 x 40 | 19 nH | 6.0 | 4.2Ω | 6 | 13 |
| 40 x 40 | 23 nH | 6.5 | 4.7Ω | 6 | 14 |
| 50 x 50 | 28 nH | 7.0 | 5.3Ω | 7 | 14 |

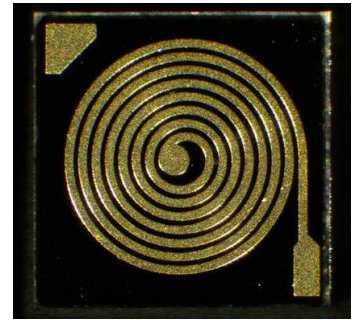

50x50 Spiral Inductor

Substrates

| Code | Substrate |
|------|---|
| 20 | Quartz |
| 35 | 99.6% Alumina (Al ₂ O ₃) |

Metallizations

| Metallization | | Code | Note |
|---------------|-------------|------|-------------------|
| Top Side | Bottom Side | | |
| Ta/Pd/Au | — | A | Wirebondable |
| Ta/Pd/Au | Ta/Pd/Au | D | Wirebond or Epoxy |

Other metallizations available. Please contact PPI.

Inductance Codes

| Inductance (nH) |
|-------------------------------------|
| Digits 1-4 are significant figures |
| The "R" is used as a decimal point. |
| e.g. 28R0 = 28nH, 1R50 = 1.5nH |

Inductance values are computed in free air, using a magnetic permeability for free air of $\mu = 4.0 \times 10^{-7}$. DC resistance is based on a gold metallization.

Protective Coating

| Code | Polyimide Coating |
|------|------------------------|
| B | Without Coating |
| P | With Polyimide Coating |


Packaging

| Code | Style |
|------|------------------------|
| W | Waffle Pack (Standard) |
| G | Gel Pack |

All parts are supplied in waffle packs. Other packaging may be available. Contact PPI for additional packaging options.

General Properties

| | |
|-----------------------|----------------------------------|
| Operating Temperature | -55°C to +150°C |
| Storage Temperature | -65°C to +150°C |
| Operating Frequency | DC to 500 MHz |
| Insulation Resistance | 10 ¹² Ω · min at 25°C |

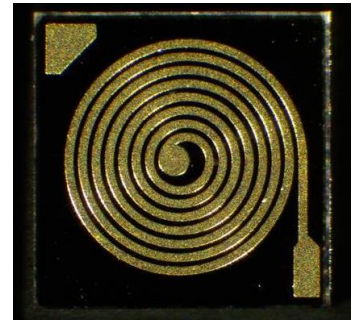

50x50 Spiral Inductor

Testing

| Testing Performed | Specification / Standard |
|--------------------------------|------------------------------|
| Visual Inspection | MIL-PRF-55342 MIL-STD-883 |
| Mechanical Inspection | MIL-PRF-55342 |
| DC Resistance | MIL-PRF-55342 MIL-STD-202 |
| High Temperature Exposure | MIL-PRF-55342 |
| Thermal Shock | MIL-PRF-55342 MIL-STD-202 |
| Resistance to Bonding Exposure | MIL-PRF-55342 |
| Wire Bonding Integrity | MIL-PRF-55342 |
| Life Test | MIL-PRF-55342 MIL-STD-202 |

Performance Specifications

Additional sizes and custom inductors available. Please contact sales@passiveplus.com.

