


≠ Features


- Excellent volumetric efficiency and stability of capacitance with temperature
- High voltage capacitors
- Special internal electrode design for high voltage rating
- Surface mount suitable for wave and reflow soldering
- High Reliability
- RoHS Compliant

≠ Applications

- LAN/WLAN interface
- Back-lighting inverter, DC-DC converters
- Ballast, Modems and Power Supplies

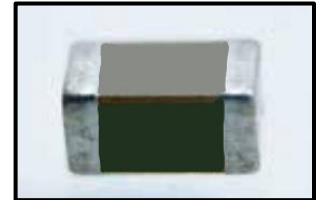


≠ Part Numbering

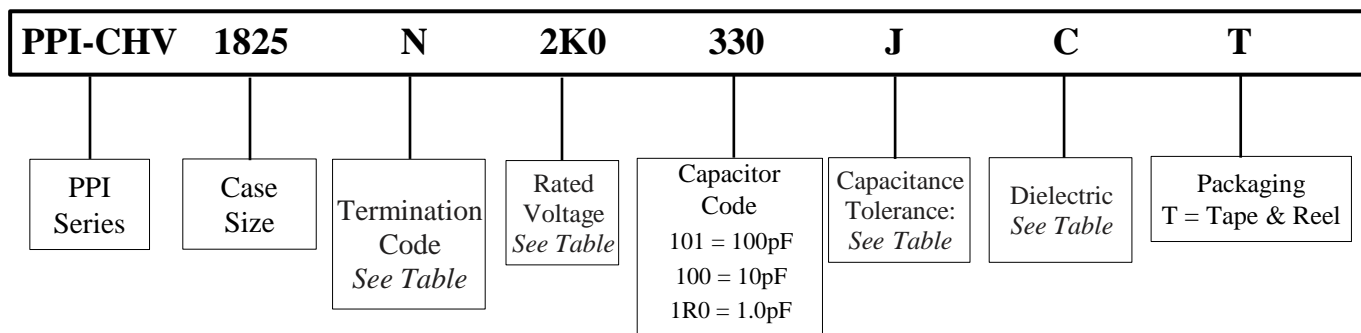

≠ Dimensions (mm)

Dimensions (mm)					
Size	L	W	T	B (min)	BW (min)
1825	4.60 ± 0.30	6.25 ± 0.40	*	2.50	0.30

* See Capacitance Range charts on following pages

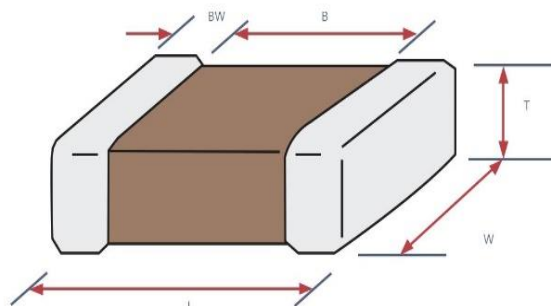



≠ Terminations

Code	Description
F	Silver Palladium
N	Nickel Barrier
A	High Leach Resistant Silver Palladium

≠ Rated Voltages

Code	Voltage	Code	Voltage	Code	Voltage
250	250V	1K5	1.5KV	3K0	3KV
500	500V	2K0	2KV	4K0	4KV
630	630V	2K5	2.5KV	5K0	5KV
1K0	1KV				

≠ Capacitance Codes

Cap Code	Value	Cap Code	Value	Cap Code	Value
330	33pF	102	1.0nF	104	0.1uF
101	100pF	103	10nF	105	1.0uF

≠ Capacitance Tolerances

Code	B	C	F	G	J	K	M
Tol.	±0.1pF	±0.25pF	±1%	±2%	±5%	±10%	±20%

≠ Dielectric Codes

Code	C	X
	COG	X7R

≠ Performance

Dielectric Classification	C = COG / NP0 (Ultra Stable)	X = X7R (Stable)
Operating Temperature	-55°C to 125°C	-55°C to 125°C
Rated Voltage	250V – 3000V	250V – 5000V
Temperature Coefficient	≤±30ppmi/°C, -55°C ~+125°C (EIA Class I)	≤±15ppmi/°C, -55°C ~+125°C (EIA Class II)
Dissipation Factor	NP0: Q>1000	X7R: D.F. ≤2.5%
Insulation Resistance	10GΩ or 500/CΩ whichever is smaller	
Aging	NP0: 0%	X7R: Typically, 1.0% per decade of time
Dielectric Strength	100 ≤ V < 500V, 200% Rated Voltage 500 ≤ V < 1000V, 150% Rated Voltage 1000 ≤ V, 120% Rated Voltage	



± PPI-CHV SERIES: 1825

Dielectric		COG								X7R						
T (max)		1.8	2.6	2.6	2.6	2.6	2.6	2.6	2.6	3.0	1.8	2.2	2.2	2.6	2.6	2.7
Rated Voltage		250	500	630	1000	1500	2000	2500	3000	250	500	1000	2000	3000	4000	5000
Cap Value	Code															
2.0pF	2R0															
3.3pF	3R3															
3.9pF	3R9															
5.0pF	5R0															
8.2	8R2															
10	100															
12	120															
15	150															
18	180															
22	220															
27	270															
33	330															
39	390															
47	470															
56	560															
68	680															
82	820															
100	101															
120	121															
150	151															
180	181															
220	221															
270	271															
330	331															
390	391															
470	471															
560	561															
680	681															
820	821															




± PPI-CHV SERIES: 1825

Dielectric		COG								X7R						
T (max)		1.8	2.6	2.6	2.6	2.6	2.6	2.6	2.6	3.0	1.8	2.2	2.2	2.6	2.6	2.7
Rated Voltage		250	500	630	1000	1500	2000	2500	3000	250	500	1000	2000	3000	4000	5000
Cap Value	Code															
1.0nF	102															
1.2	122															
1.5	152															
1.8	182															
2.2	222															
2.7	272															
3.3	332															
3.9	392															
4.7	472															
5.6	562															
6.8	682															
8.2	822															
10	103															
12	123															
15	153															
18	183															
22	223															
27	273															
33	333															
39	393															
47	473															
56	563															
68	683															
82	823															
100	104															
124	124															
154	154															
184	184															
224	224															
274	274															
334	334															
394	394															
474	474															
564	564															
684	684															
824	824															
1.0uF	105															
2.2	225															

≠ Packaging: Embossed Plastic Carrier Tape

Size	Qty per 7" Reel	Qty 10/13" Reel
1825	500, 1000	2K

≠ Tape & Reel Specifications

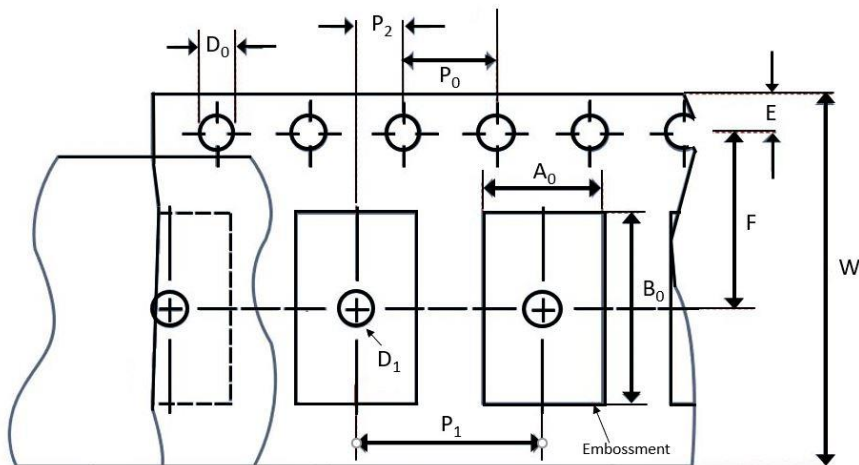

Unit: mm

Size	W	P_0	P_1	P_2	D_0	D_1	E	F
1825	12.00 ± 0.30	4.00 ± 0.10	8.00 ± 0.10	2.00 ± 0.05	1.50 ± 0.10	1.00 ± 0.10	1.75 ± 0.10	5.50 ± 0.05

$A_0 B_0$

- Determined by component size to minimize rotation.
- The component cannot rotate more than 20° within the determined cavity.