


**High-Q Low ESR Capacitor Tape & Reel Specifications**

Case Size	Orientation	Measurement Unit	W	P0	P1	T	F	Minimum Qty per Reel	Std Qty per Reel	Tape Material
0201N	H	in.	0.315	0.157	0.079	0.017	0.138	1000	15000	Paper
		mm	8.00	4.00	2.00	0.42	3.50			
0402N	H	in.	0.315	0.157	0.079	0.003	0.138	1000	10000	Paper
		mm	8.00	4.00	2.00	0.07	3.50			
0603N	H	in.	0.315	0.157	0.157	0.004	0.138	500	4000	Paper
		mm	8.00	4.00	4.00	0.10	3.50			
0708N	V	in.	0.472	0.157	0.157	0.012	0.217	500	1500	Plastic
		mm	12.00	4.00	4.00	0.30	5.50			
0805N	H	in.	0.315	0.157	0.157	0.009	0.138	500	3000	Plastic
		mm	8.00	4.00	4.00	0.22	3.50			
	V	in.	0.315	0.157	0.157	0.009	0.138	500	1000	Plastic
		mm	8.00	4.00	4.00	0.22	3.50			
1111N	H	in.	0.315	0.157	0.157	0.010	0.138	500	2000	Plastic
		mm	8.00	4.00	4.00	0.25	3.50			
	V	in.	0.472	0.157	0.157	0.016	0.217	500	1500	
		mm	12.00	4.00	4.00	0.40	5.50			
0505CP	H	in.	0.315	0.157	0.157	0.009	0.138	500	3000	Plastic
		mm	8.00	4.00	4.00	0.22	3.50			
	V	in.	0.472	0.157	0.157	0.012	0.217	500	2000	
		mm	12.00	4.00	4.00	0.30	5.50			
1111CP	H	in.	0.315	0.157	0.157	0.009	0.138	500	2000	Plastic
		mm	8.00	4.00	4.00	0.22	3.50			
	V	in.	0.315	0.157	0.157	0.009	0.138	500	1500	
		mm	8.00	4.00	4.00	0.22	3.50			
2225CP	H	in.	0.630	0.157	0.472	0.012	0.295	500	500	Plastic
		mm	16.00	4.00	12.00	0.30	7.50			
	V	in.	0.630	0.157	0.315	0.020	0.295	300	300	
		mm	16.00	4.00	8.00	0.50	7.50			
3838CP	H	in.	0.630	0.157	0.630	0.012	0.295	50	200	Plastic
		mm	16.00	4.00	16.00	0.30	7.50			
0505X	H	in.	0.315	0.157	0.157	0.012	0.138	500	4000	Plastic
		mm	8.00	4.00	4.00	0.30	3.50			
1111X	H	in.	0.315	0.157	0.157	0.012	0.138	500	2000	Plastic
		mm	8.00	4.00	4.00	0.30	3.50			
2225X	H	in.	0.472	0.157	0.157	0.016	0.217	500	500	Plastic
		mm	12.00	4.00	4.00	0.40	5.50			

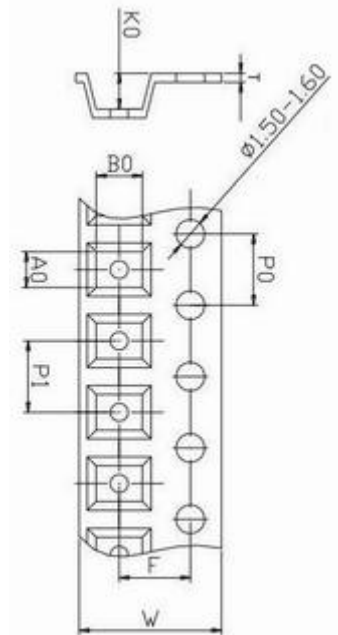

$A_0B_0K_0$

- Determined by component size. Typical clearance between the cavity and the component is: .50 (.002) min to .65 (.026) max for 12mm tape.
- The component cannot rotate more than 20° within the determined cavity.