


Product Features

Border Caps have the topside electrode withdrawn from the edges in order to increase the distance between electrodes and dramatically decrease the possibilities of shorting when epoxy die-mounting. This style is also widely used for optical recognition-based assembly.




Increased margin sizes and special terminations are available for high power LC filter applications. Border Caps can be customized to any sized square or rectangle. Contact PPI for more information.



- Capacitance: 0.04 to 3300pF

Part Numbering

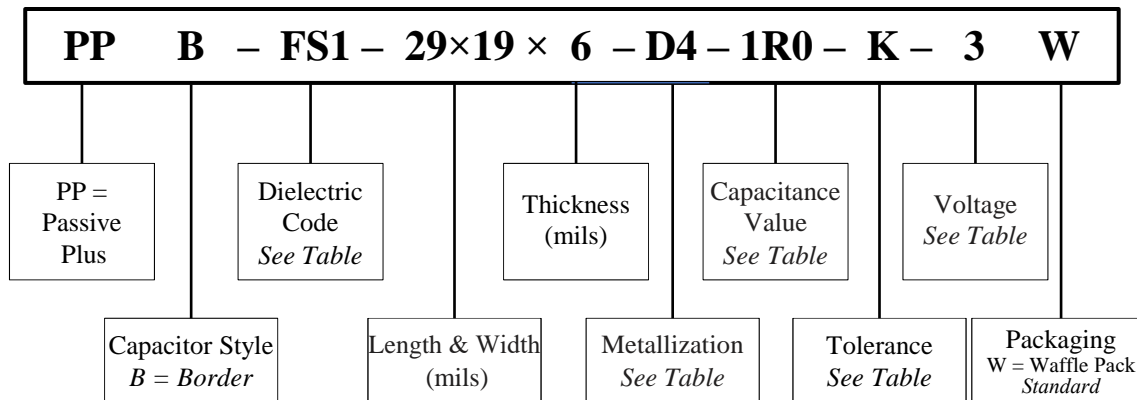

Thicknesses (mils)

Length & Width	L or W Tolerance	Margin Nominal	Thickness
≤ 10	± 2	1	± 1.5
11 - 29	± 2	2	
≥ 30	± 3	2	

Metallization Codes

Code	Description
D4	Ti/Pt/Au - Titanium/Platinum/Gold (70 μin Gold)
D5	Ti/NiV/Au - Titanium/Nickel Vanadium/Gold (70 μin Gold)
S7	Ti/Pt/Ag - Titanium/Platinum/Silver (20 μin Silver)
K2	Ta/Pd/Au - Tantalum/Palladium/Gold (75 μin Gold)
L3	Ta/Pd/Au - Tantalum/Palladium/Gold (100 μin Gold)

Contact PPI for available metallizations.

Capacitance Codes

Value	Code
<10pF	1R0 = 1.0pF
>10pF	101 = 100pF



Substrates

Substrates can be supplied as follows:

- **Bare**

- **Metallized:**
 - Gold over Platinum, Palladium, or Nickel
 - Silver over Platinum
 - Custom schemes and patterns to Customer specifications

Thickness Range 3 mils +

Length and Width Up to 4" depending on material



Standard Electrode Metallizations

Gold (D4) This metallization consists of a minimum of 70 micro-inches of Gold over Platinum or Nickel which is ideal for all wirebonding methodologies.

Silver (S7) This metallization consists of 20 micro-inches of Silver over Platinum which is ideal for all solder applications whenever the use of Gold is unacceptable.



Capacitance Tolerance & Dimensional Tolerances Codes

Class I Dielectrics: AS1 - KS2			
Tolerance	Code	Tolerance	Code
± .50pF	D	± 20%	M
± .25pF	C	± 15%	L
± .10pF	B	± 10%	K
± .05pF	A	± 5%	J
± .01pF	P	± 3%	H
		± 2%	G

Material	L or W Dimension	Tolerance
AS1 - ZS1	< 20 mils	±15%
	≥ 20 mils	±10%

Class II Dielectrics: MS1 - ZS4			
Tolerance	Code	Tolerance	Code
-10% thru +40%	Y	± 20%	M
-20% thru +80%	Z	± 15%	L
0% thru +100%	V	± 10%	K
Guaranteed Min. Value	GMV	± 5%	J

Material	L or W Dimension	Tolerance
ZS4 - ZS6	≤ 15 mils	± 2 mils
	> 15 mils; ≤ 30 mils	± 3 mils
	> 30 mils	± 5 mils



Rated Voltage Codes

Code	Voltage	Dielectric Thickness
2	50V	≤5 mils
3	100V	≥6 mils



Packaging

PPI SLCs are available in Waffle Packs (Standard). Other packaging options may be available. Please contact PPI.

≠ Dielectric Materials – Class I

Dielectrics below consist of material exhibiting very low losses, extremely low or closely controlled temperature coefficients, negligible voltage and frequency coefficients, negligible aging effects and high insulation and dielectric breakdown.

Type	IR Min. @ 25°C Ω	Temperature Coefficient PPM°C -55 to +125°C	Dissipation Factor (@ 10GHz)	Dielectric Constant (K)	Material
AS1	10 ¹²	Negligible	0.0001	3.8	Quartz
AS6	10 ¹²	P120 ± 25	0.0001	8.7	AlN
AS7	10 ¹²	P180 ± 50	0.0006	9.6	Alumina 96
AS8	10 ¹²	P180 ± 50	0.0006	9.8	Alumina 99.6
BS2	10 ¹²	NP0 0 ± 30	0.0001	12.6	Titanate
CS1	10 ¹²	0 ± 30	0.0010	20	Titanate
ES1	10 ¹²	0 ± 30	0.0020	40	Titanate
FS1	10 ¹²	0 ± 30	0.0050	50	Titanate
IS2	10 ⁴	N750 ± 200	0.0050	85	Alumina
JS2	10 ⁶	0 ± 30	0.0050	93	Titanate
KS3	10 ⁶	N1500 ± 500	0.0025	160	Titanate

≠ Dielectric Materials – Class II

Dielectrics below are characterized by high dielectric constants, increased losses and higher temperature coefficients. These properties are inherent with this class of material but the high dielectric constants permit the use of smaller size to achieve low series inductance and meet dimensional requirements. Capacitors made with these materials are often used for coupling of microstrip line circuits where a small chip is necessary. Used as a bypass capacitor, the small size provides low series inductance and dielectric losses are typically of little concern.

Type	IR Min. @ 25°C Ω	Temperature Coefficient % -55 to +125°C	Dissipation Factor (@ 1MHz)	Aging (%) HR/Decade	Dielectric Constant (K)
MS1	10 ¹¹	-10 to 5	0.010	2.0	300
PS1	10 ⁴	-10 to 10	0.025	3.0	700
RS2	10 ⁴	-10 to 10	0.025	3.0	1250
SS3	10 ¹¹	-10 to 3	0.015	3.5	2200
US1	10 ⁵	-35 to 0	0.020	3.0	4000
US3	10 ¹¹	-15 to 15	0.030	3.0	4500
ZS1	10 ¹¹	-80 to 0	0.025	3.0	11000
ZS4	*	-15 to 15	0.035	3.0	25000
ZS6	*	-15 to 15	0.035	3.0	35000

Other dielectric materials available depending on application requirements



≠ Capacitance, Case Size & Dielectric Availability - Class I Dielectrics

Cap (pF)	Size mils (mm)																	
	10x10 (.254 x .254)		12x12 (.305 x .305)		15x15 (.381 x .381)		20x20 (.508 x .508)		25x25 (.635 x .635)		30x30 (.762 x .762)		35x35 (.889 x .889)		40x40 (1.016 x 1.016)		50x50 (1.270 x 1.270)	
	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness
0.04	AS7	4	AS7	4	AS7	5	AS1	5							Class I Dielectrics			
0.06	ES1	10	AS7	4	AS7	6	AS1	5	AS1	8	AS1	10						
0.08	ES1	7	ES1	10	AS7	5	AS7	10	AS1	6	AS1	8	AS1	11				
0.1	ES1	6	ES1	9	AS7	4	AS7	7	AS1	5	AS1	7	AS1	10				
0.2	IS1	4	ES1	4	ES1	5	AS7	4	AS7	5	AS7	7	AS1	4	AS1	5	AS1	10
0.3	KS2	6	IS1	5	ES1	4	ES1	8	AS7	4	AS7	5	AS7	7	AS1	4	AS1	6
0.4	KS2	4	IS1	4	IS1	6	ES1	6	ES1	10	AS7	4	AS7	5	AS7	7	AS1	5
0.5	MS1	5	KS2	4	IS1	5	ES1	4	ES1	7	ES1	10	AS7	4	AS7	6	AS7	10
0.6	MS1	5	KS2	5	IS1	4	ES1	4	ES1	6	ES1	10	AS7	4	AS7	5	AS7	7
0.8	MS1	5	MS1	5	KS2	5	IS1	6	ES1	5	ES1	7	ES1	10	AS7	4	AS7	6
1.0	MS1	4	MS1	5	KS2	4	IS1	5	ES1	4	ES1	6	ES1	8	ES1	10	AS7	5
1.2	RS1	6	MS1	5	MS1	7	IS1	4	IS1	7	ES1	5	ES1	7	ES1	10	AS7	4
1.5	RS1	7	MS1	4	MS1	6	KS2	6	IS1	6	IS1	8	ES1	6	ES1	7	ES1	15
1.8	RS1	6	MS1	4	MS1	5	KS2	5	IS1	5	IS1	7	ES1	5	ES1	7	ES1	10
2.0	RS1	6	RS1	8	MS1	4	KS2	5	IS1	5	IS1	6	ES1	4	ES1	6	ES1	10
2.2	RS1	5	RS1	7	MS1	4	MS1	7	KS2	7	IS1	6	ES1	4	ES1	5	ES1	10
2.7	RS1	5	RS1	6	MS1	4	MS1	6	KS2	6	IS1	6	IS1	8	ES1	5	ES1	8
3.3	SS3	6	RS1	6	RS1	8	MS1	5	KS2	5	IS1	4	IS1	6	IS1	7	ES1	6
3.9	SS3	5	RS1	5	RS1	7	MS1	4	KS2	4	KS2	6	IS1	5	IS1	6	ES1	5
4.7	SS3	5	RS1	5	RS1	7	MS1	4	MS1	6	KS2	5	IS1	4	IS1	5	IS1	8
5.6	SS3	5	SS3	6	RS1	5	MS1	4	MS1	5	KS2	4	KS2	6	IS1	5	IS1	7
6.8	US1	5	SS3	6	RS1	5	RS1	8	MS1	5	MS1	7	KS2	5	KS2	7	IS1	6
8.2	US1	4	SS3	5	RS1	4	RS1	7	MS1	4	MS1	6	KS2	4	KS2	5	IS1	5
10	US1	5	SS3	4	SS3	6	RS1	6	MS1	4	MS1	5	MS1	6	KS2	5	IS1	4
12	US1	5	US1	6	SS3	5	RS1	5	RS1	8	MS1	4	MS1	6	KS2	4	KS2	6
15	US1	4	US1	5	SS3	5	RS1	5	RS1	7	MS1	4	MS1	5	MS1	6	KS2	5
18	VS1	4	VS1	6	US1	7	SS3	7	RS1	5	RS1	9	MS1	4	MS1	5	KS2	4
20	ZS1	5	VS1	5	US1	6	SS3	6	RS1	5	RS1	8	MS1	4	MS1	5	KS2	4

Other dielectric materials available depending on application requirements

Shaded cells indicate Class II Dielectrics



≠ Capacitance, Case Size & Dielectric Availability – Class II Dielectrics

Cap (pF)	Size mils (mm)																	
	10x10		12x12		15x15		20x20		25x25		30x30		35x35		40x40		50x50	
	(.254 x .254)		(.305 x .305)		(.381 x .381)		(.508 x .508)		(.635 x .635)		(.762 x .762)		(.889 x .889)		(1.016 x 1.016)		(1.270 x 1.270)	
	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness
22	ZS1	7	VS1	4	US1	5	SS3	6	RS1	5	RS1	7	RS1	10	MS1	4	MS1	6
27	ZS1	6	VS1	4	VS1	5	SS3	5	RS1	4	RS1	6	RS1	8	MS1	4	MS1	5
33	ZS1	5	ZS1	6	VS1	4	SS3	4	SS3	6	RS1	5	RS1	7	RS1	9	MS1	5
39	ZS1	4	ZS1	5	VS1	4	US1	6	SS3	6	RS1	4	RS1	6	RS1	8	MS1	4
47	ZS4	8	ZS1	5	ZS1	6	US1	5	SS3	5	SS3	7	RS1	5	RS1	7	RS1	11
56	ZS4	6	ZS1	4	ZS1	5	VS1	5	SS3	4	SS3	6	RS1	4	RS1	6	RS1	9
68	ZS4	5	ZS4	8	ZS1	5	VS1	4	US1	6	SS3	5	RS1	4	RS1	5	RS1	7
82	ZS6	6	ZS4	6	ZS1	4	VS1	4	US1	5	SS3	4	SS3	6	RS1	4	RS1	6
100	ZS6	5	ZS4	6	ZS1	4	ZS1	6	VS1	5	US1	6	SS3	5	SS3	7	RS1	5
120			ZS4	5	ZS4	6	ZS1	5	VS1	4	VS1	6	SS3	4	SS3	5	RS1	4
150			ZS4	6	ZS4	6	ZS1	4	ZS1	7	VS1	5	VS1	7	SS3	4	SS3	7
180			ZS6	5	ZS4	5	ZS1	4	ZS1	6	VS1	4	VS1	6	SS3	4	SS3	6
200					ZS6	5	ZS1	4	ZS1	6	VS1	4	VS1	5	US1	6	SS3	5
220					ZS6	5	ZS4	8	ZS1	5	VS1	4	VS1	5	US1	5	SS3	5
270					ZS6	5	ZS4	6	ZS1	4	ZS1	7	VS1	4	VS1	6	SS3	4
330							ZS4	5	ZS1	4	ZS1	5	ZS1	7	VS1	5	US1	6
390							ZS4	5	ZS4	6	ZS1	5	ZS1	6	VS1	4	US1	5
470							ZS4	4	ZS4	6	ZS1	4	ZS1	5	ZS1	7	VS1	5
560							ZS6	5	ZS6	6	ZS1	4	ZS1	5	ZS1	6	VS1	4
680									ZS6	6	ZS4	6	ZS1	4	ZS1	5	ZS1	8
820									ZS6	5	ZS4	5	ZS4	8	ZS1	4	ZS1	7
1000											ZS6	6	ZS4	6	ZS4	8	ZS1	6
1200											ZS6	5	ZS4	5	ZS4	7	ZS1	5
1500													ZS6	6	ZS4	5	ZS1	4
1800													ZS6	5	ZS6	6	ZS4	7
2200															ZS6	5	ZS4	6
2700															ZS6	5	ZS4	5
3300																	ZS6	5

Other dielectric materials available depending on application requirements

≠ Typical Temperature Characteristics

