
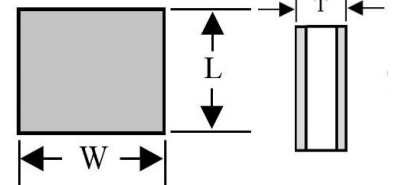



### ≠ Product Features

PPI offers Standard Edge to Edge SLC with tight tolerances to the required size, shape and value. Thicknesses of up to 25+ mils are available utilizing temperature-stable low-loss materials and special terminations to improve the all solder process. Chip size, shape and electrical properties may be determined from the dielectric material.

- Capacitance: 0.04 to 10,000pF
- Square or rectangle, length or width .005” and up

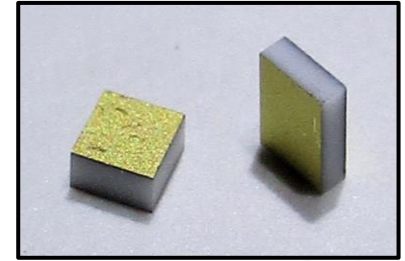

### ≠ Part Numbering

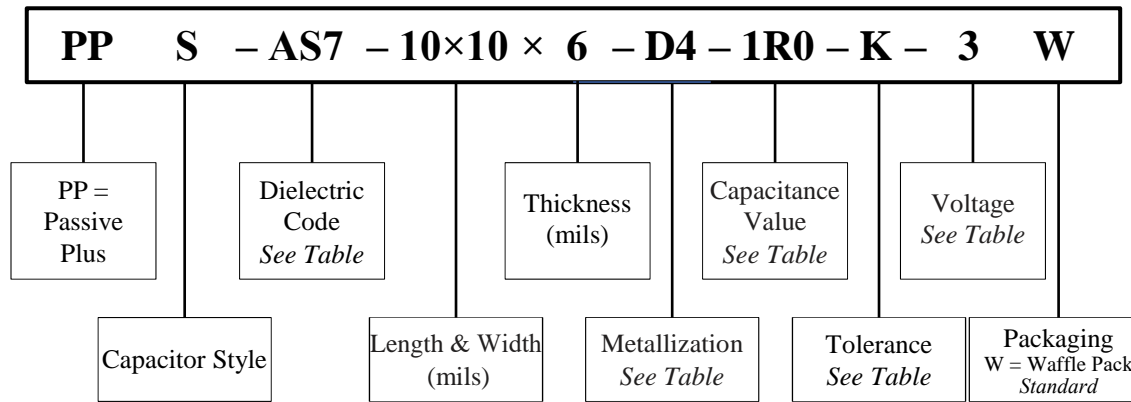

### ≠ Thicknesses (mils)

Length & Width	L or W Tolerance	Margin Nominal	Thickness
≤ 10	± 2	1	± 1.5
11 - 29	± 2	2	
≥ 30	± 3	2	

### ≠ Metallization Codes

Code	Description
<b>D4</b>	Ti/Pt/Au - Titanium/Platinum/Gold <b>(70 μin Gold)</b>
<b>D5</b>	Ti/NiV/Au - Titanium/Nickel Vanadium/Gold <b>(70 μin Gold)</b>
<b>S7</b>	Ti/Pt/Ag - Titanium/Platinum/Silver <b>(20 μin Silver)</b>
<b>K2</b>	Ta/Pd/Au - Tantalum/Palladium/Gold <b>(75 μin Gold)</b>
<b>L3</b>	Ta/Pd/Au - Tantalum/Palladium/Gold <b>(100 μin Gold)</b>

Contact PPI for available metallizations.

### ≠ Capacitance Codes

Value	Code
<10pF	1R0 = 1.0pF
>10pF	101 = 100pF



### Substrates

Substrates can be supplied as follows:

- **Bare**

---

- **Metallized:**
  - Gold over Platinum, Palladium, or Nickel
  - Silver over Platinum
  - Custom schemes and patterns to Customer specifications

**Thickness Range** 3 mils +

**Length and Width** Up to 4" depending on material



### Standard Electrode Metallizations

**Gold (D4)** This metallization consists of a minimum of 70 micro-inches of Gold over Platinum or Nickel which is ideal for all wirebonding methodologies.

**Silver (S7)** This metallization consists of 20 micro-inches of Silver over Platinum which is ideal for all solder applications whenever the use of Gold is unacceptable.



### Capacitance Tolerance & Dimensional Tolerances Codes

#### Class I Dielectrics: AS1 - KS2

Tolerance	Code	Tolerance	Code
± .50pF	D	± 20%	M
± .25pF	C	± 15%	L
± .10pF	B	± 10%	K
± .05pF	A	± 5%	J
± .01pF	P	± 3%	H
		± 2%	G

Material	L or W Dimension	Tolerance
AS1 - ZS1	< 20 mils	±15%
	≥ 20 mils	±10%

#### Class II Dielectrics: MS1 - ZS4

Tolerance	Code	Tolerance	Code
-10% thru +40%	Y	± 20%	M
-20% thru +80%	Z	± 15%	L
0% thru +100%	V	± 10%	K
Guaranteed Min. Value	GMV	± 5%	J

Material	L or W Dimension	Tolerance
ZS4 - ZS6	≤ 15 mils	± 2 mils
	> 15 mils; ≤ 30 mils	± 3 mils
	> 30 mils	± 5 mils



### Rated Voltage Codes

Code	Voltage	Dielectric Thickness
2	50V	≤5 mils
3	100V	≥6 mils



### Packaging

PPI SLCs are available in Waffle Packs (Standard). Other packaging options may be available. Please contact PPI.





**≠ Dielectric Materials – Class I**

Dielectrics below consist of material exhibiting very low losses, extremely low or closely controlled temperature coefficients, negligible voltage and frequency coefficients, negligible aging effects and high insulation and dielectric breakdown.

Type	IR Min. @ 25°C Ω	Temperature Coefficient PPM°C -55 to +125°C	Dissipation Factor (@ 10GHz)	Dielectric Constant (K)	Material
AS1	10 <sup>12</sup>	Negligible	0.0001	3.8	Quartz
AS6	10 <sup>12</sup>	P120 ± 25	0.0001	8.7	AlN
AS7	10 <sup>12</sup>	P180 ± 50	0.0006	9.6	Alumina 96
AS8	10 <sup>12</sup>	P180 ± 50	0.0006	9.8	Alumina 99.6
BS2	10 <sup>12</sup>	NP0 0 ± 30	0.0001	12.6	Titanate
CS1	10 <sup>12</sup>	0 ± 30	0.0010	20	Titanate
ES1	10 <sup>12</sup>	0 ± 30	0.0020	40	Titanate
FS1	10 <sup>12</sup>	0 ± 30	0.0050	50	Titanate
IS2	10 <sup>4</sup>	N750 ± 200	0.0050	85	Alumina
JS2	10 <sup>6</sup>	0 ± 30	0.0050	93	Titanate
KS3	10 <sup>6</sup>	N1500 ± 500	0.0025	160	Titanate

**≠ Dielectric Materials – Class II**

Dielectrics below are characterized by high dielectric constants, increased losses and higher temperature coefficients. These properties are inherent with this class of material but the high dielectric constants permit the use of smaller size to achieve low series inductance and meet dimensional requirements. Capacitors made with these materials are often used for coupling of microstrip line circuits where a small chip is necessary. Used as a bypass capacitor, the small size provides low series inductance and dielectric losses are typically of little concern.

Type	IR Min. @ 25°C Ω	Temperature Coefficient % -55 to +125°C	Dissipation Factor (@ 1MHz)	Aging (%) HR/Decade	Dielectric Constant (K)
MS1	10 <sup>11</sup>	-10 to 5	0.010	2.0	300
PS1	10 <sup>4</sup>	-10 to 10	0.025	3.0	700
RS2	10 <sup>4</sup>	-10 to 10	0.025	3.0	1250
SS3	10 <sup>11</sup>	-10 to 3	0.015	3.5	2200
US1	10 <sup>5</sup>	-35 to 0	0.020	3.0	4000
US3	10 <sup>11</sup>	-15 to 15	0.030	3.0	4500
ZS1	10 <sup>11</sup>	-80 to 0	0.025	3.0	11000
ZS4	*	-15 to 15	0.035	3.0	25000
ZS6	*	-15 to 15	0.035	3.0	35000

*Other dielectric materials available depending on application requirements*



**± Capacitance, Case Size & Dielectric Availability - Class I Dielectrics**

Cap (pF)	Size mils (mm)																	
	10x10		12x12		15x15		20x20		25x25		30x30		35x35		40x40		50x50	
	(.254 x .254)		(.305 x .305)		(.381 x .381)		(.508 x .508)		(.635 x .635)		(.762 x .762)		(.889 x .889)		(1.016 x 1.016)		(1.270 x 1.270)	
	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness
0.04	AS7	5	AS7	6	AS7	10												
0.06	AS7	4	AS7	5	AS7	8	AS1	5	AS1	10								
0.08	ES1	10	AS7	4	AS7	6	AS7	10	AS1	7	AS1	9						
0.1	ES1	8	ES1	11	AS7	5	AS7	9	AS1	5	AS1	7	AS1	10				
0.2	ES1	5	ES1	7	ES1	10	AS7	4	AS7	7	AS7	10	AS1	5	AS1	7	AS1	10
0.3	IS1	6	ES1	4	ES1	6	ES1	11	AS7	4	AS7	7	AS7	9	AS1	5	AS1	7
0.4	IS1	5	IS1	7	ES1	5	ES1	9	ES1	15	AS7	5	AS7	7	AS7	9	AS1	5
0.5	IS1	4	IS1	5	ES1	4	ES1	7	ES1	11	AS7	5	AS7	5	AS7	7	AS1	4
0.6	KS2	6	IS1	5	IS1	7	ES1	6	ES1	10	ES1	15	AS7	4	AS7	6	AS7	9
0.8	MS1	8	KS2	6	IS1	5	ES1	5	ES1	7	ES1	10	ES1	15	AS7	4	AS7	7
1.0	MS1	7	KS2	5	IS1	4	IS1	7	ES1	6	ES1	8	ES1	10	AS7	4	AS7	5
1.2	MS1	6	KS2	4	IS1	4	IS1	6	ES1	5	ES1	7	ES1	9	AS7	3	AS7	5
1.5	MS1	5	MS1	7	KS2	5	IS1	5	ES1	4	ES1	6	ES1	7	ES1	10	AS7	4
1.8	MS1	4	MS1	5	KS2	4	IS1	4	IS1	6	ES1	5	ES1	6	ES1	8	ES1	11
2.0	MS1	4	MS1	5	KS2	4	KS2	7	IS1	6	ES1	4	ES1	5	ES1	7	ES1	11
2.2	RS1	4	MS1	5	KS2	4	KS2	6	IS1	5	IS1	7	ES1	5	ES1	7	ES1	10
2.7	RS1	8	MS1	4	MS1	6	KS2	5	IS1	4	IS1	6	ES1	4	ES1	5	ES1	8
3.3	RS1	7	RS1	10	MS1	5	KS2	4	KS2	6	IS1	5	IS1	7	ES1	4	ES1	7
3.9	RS1	6	RS1	9	MS1	4	MS1	7	KS2	5	IS1	4	IS1	6	IS1	8	ES1	6
4.7	RS1	5	RS1	7	RS1	11	MS1	6	KS2	4	KS2	6	IS1	5	IS1	6	ES1	5
5.6	RS1	4	RS1	6	RS1	10	MS1	5	MS1	7	KS2	5	IS1	4	IS1	5	ES1	4
6.8	RS1	4	RS1	5	RS1	8	MS1	4	MS1	6	KS2	5	KS2	6	IS1	4	IS1	7
8.2	SS3	6	RS1	4	RS1	7	MS1	4	MS1	5	KS2	4	KS2	5	KS2	7	KS2	10
10	SS3	5	RS1	4	RS1	5	RS1	9	MS1	4	MS1	6	KS2	4	KS2	5	KS2	8
12	SS3	4	SS3	6	RS1	5	RS1	8	RS1	11	MS1	5	MS1	7	KS2	4	KS2	7
15	US1	6	SS3	5	RS1	4	RS1	6	RS1	10	MS1	4	MS1	6	MS1	7	KS2	6
18	US1	5	SS3	4	SS3	6	RS1	5	RS1	8	RS1	11	MS1	4	MS1	6	KS2	5
20	US1	5	SS3	4	SS3	6	RS1	5	RS1	8	RS1	11	MS1	4	MS1	5	KS2	4
22	US1	4	US1	6	SS3	5	RS1	4	RS1	7	RS1	9	MS1	4	MS1	5	KS2	4

Other dielectric materials available depending on application requirements

**Shaded cells indicate Class II Dielectrics**



**± Capacitance, Case Size & Dielectric Availability – Class II Dielectrics**

Cap (pF)	Size mils (mm)																	
	10x10 (.254 x .254)		12x12 (.305 x .305)		15x15 (.381 x .381)		20x20 (.508 x .508)		25x25 (.635 x .635)		30x30 (.762 x .762)		35x35 (.889 x .889)		40x40 (1.016 x 1.016)		50x50 (1.270 x 1.270)	
	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness	Dielectric	Thickness
27	US1	4	US1	5	SS3	4	RS1	4	RS1	6	RS1	8	MS1	3	MS1	4	MS1	6
33	VS1	4	US1	4	US1	6	SS3	6	RS1	5	RS1	6	RS1	11	MS1	4	MS1	5
39	ZS1	6	US1	4	US1	5	SS3	5	RS1	4	RS1	5	RS1	7	RS1	10	MS1	4
47	ZS1	5	ZS1	7	US1	5	SS3	4	SS3	6	RS1	5	RS1	6	RS1	8	MS1	4
56	ZS1	4	ZS1	6	VS1	5	US1	7	SS3	5	RS1	4	RS1	5	RS1	7	RS1	10
68	ZS1	4	ZS1	5	VS1	4	US1	6	SS3	5	SS3	6	RS1	4	RS1	6	RS1	9
82	ZS4	7	ZS1	4	ZS1	7	VS1	6	SS3	4	SS3	5	SS3	7	SS3	10	RS1	7
100	ZS4	6	ZS4	8	ZS1	6	VS1	5	US1	6	SS3	5	SS3	6	SS3	8	RS1	6
120	ZS4	5	ZS4	7	ZS1	5	ZS1	8	VS1	6	SS3	4	SS3	5	SS3	7	RS1	5
150	ZS4	4	ZS4	5	ZS1	4	ZS1	7	VS1	5	VS1	7	SS3	4	SS3	5	RS1	4
180	ZS6	4	ZS4	5	ZS4	7	ZS1	6	VS1	4	VS1	6	VS1	8	US1	8	SS3	7
200	ZS6	4	ZS4	4	ZS4	6	ZS1	5	ZS1	8	VS1	5	VS1	7	US1	7	SS3	6
220	ZS6	4	ZS6	5	ZS4	6	ZS1	4	ZS1	7	VS1	5	VS1	6	US1	6	SS3	6
270			ZS6	4	ZS4	5	ZS4	8	ZS1	6	VS1	4	VS1	5	US1	5	SS3	5
330					ZS4	4	ZS4	7	ZS1	5	ZS1	7	VS1	4	US1	4	US1	7
390					ZS6	4	ZS4	6	ZS1	4	ZS1	6	ZS1	7	ZS1	10	US1	6
470					ZS6	4	ZS4	5	ZS4	7	ZS1	5	ZS1	6	ZS1	8	US1	5
560							ZS4	4	ZS4	6	ZS1	4	ZS1	5	ZS1	7	US1	4
680							ZS6	5	ZS4	5	ZS4	8	ZS1	5	ZS1	6	VS1	4
820							ZS6	4	ZS6	6	ZS4	6	ZS1	4	ZS1	5	ZS1	7
1000									ZS6	5	ZS4	5	ZS4	7	ZS1	4	ZS1	6
1200									ZS6	4	ZS4	4	ZS4	6	ZS4	7	ZS1	5
1500											ZS6	5	ZS4	5	ZS4	6	ZS1	4
1800											ZS6	4	ZS6	6	ZS4	5	ZS4	8
2200													ZS6	5	ZS4	4	ZS4	6
2700													ZS6	4	ZS6	5	ZS4	5
3300																	ZS6	6

Other dielectric materials available depending on application requirements

≠ Typical Temperature Characteristics

