


Standard Resistor Array – PS, PB, PI Series



Product Features

- Configured in 3 to 12 resistor combinations with all resistors at the same value and tolerance.
- Custom arrays can be designed to engineer's specifications.
- Can be used in Non-Magnetic Applications


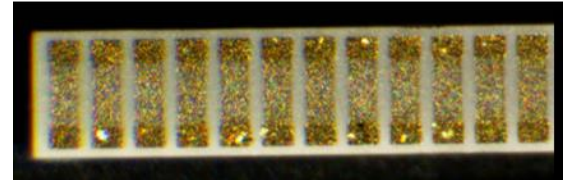


Product Specifications



Resistance Range	5Ω to 100 kΩ per resistor (Alumina) 5Ω to 1 MΩ per resistor (Silicon)
Resistive Material	Tantalum Nitride
Ratio Tolerance	To 0.01% value dependent



Isolated




Common



Series

Part Numbering

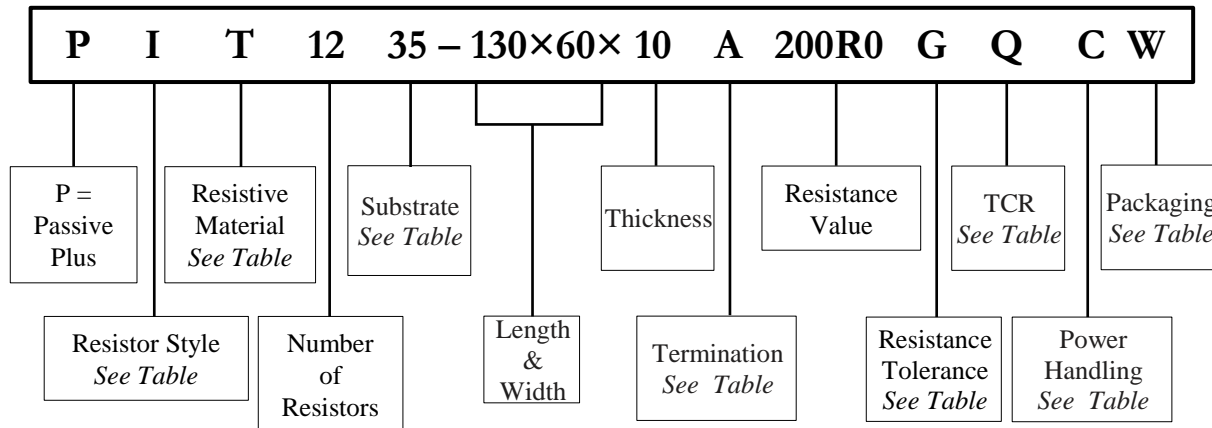

Resistor Style

Code	Style
I	Isolated Array
B	Common-Bus Array
S	Series Array

Resistive Material

Code	Material	Passivation	Sheet Resistivity (Ω/Sq)	Abs. Tolerance	Ratio Tolerance
T	Tantalum Nitride (TaN)	Self Passivating Ta ₂ O ₅	5 to 270	From ±0.01%	From ±0.01%



Thin Film Products

Standard Resistor Array – PS, PB, PI Series

Substrate Materials

Code	Material	Thickness	Surface Finish	Dielectric Constant (@ 1MHz)	Coefficient of Thermal Expansion (x 10 ⁶ /°C)	Thermal Conductivity (W/m ² *K)
35	Alumina (Al ₂ O ₃)	0.005" - 0.010"	2μ" - 3μ"	9.9	7 (25°C to < 300°C)	26.9
20	Quartz (Fused Silica)	0.005" - 0.010"	60/40 Optical Polish	3.826	0.55 (25°C to < 1000°C)	1.38

Resistance Tolerance Codes

Code	B	D	F	G	H	J	K	L	M	Q	S
Tolerance	± 0.1%	± 0.5%	± 1%	± 2%	± 3%	± 5%	± 10%	± 15%	± 20%	± 0.05%	± 0.01%

Terminations

Code	Top Side		Bottom Side	
	Metallization	Attachement Options	Metallization	Attachement Options
A	Pd / Au	Wirebond, Non-Cond. Epoxy	—	—
D	Pd / Au	Wirebond, Non-Cond. Epoxy	Ta/Pd/Au	Cond. Epoxy, Non-Cond. Epoxy, Eutectic Attach, Solder
K	Pd / Au	Wirebond, Non-Cond. Epoxy	Au Sputtered	Solder

Temperature Coefficient of Resistance

Code	TC	Material
Q*	±150 ppm/°C	Tantalum Nitride
V	±100 ppm/°C	(TaN)

Power Handling

Resistors	3	4	5	6	7	8	9	10	11	12
Length (mils)	40 (0.04")	50 (0.05")	60 (0.06")	70 (0.07")	80 (0.08")	90 (0.09")	100 (0.10")	110 (0.11")	120 (0.12")	130 (0.13")
Width	60 mils (0.06") standard									
Thickness	10 mils (0.01") standard									
Power	50 mW/ Resistor standard									

Power Handling

Code	Rating
C	50mW

Packaging

Code	Style
W	Waffle Pack (Standard)

Contact PPI for additional packaging options.




Thin Film Products

Standard Resistor Array – PS, PB, PI Series

General Properties

Operating Temperature	-55°C to +150°C
Storage Temperature	-65°C to +150°C
Operating Frequency	DC to 500 MHz
Voltage Rating	100V maximum
Power Derating (See Chart at Right)	Full power up to 70°C Derated linearly to zero power at 150°C

Power Derating Curve

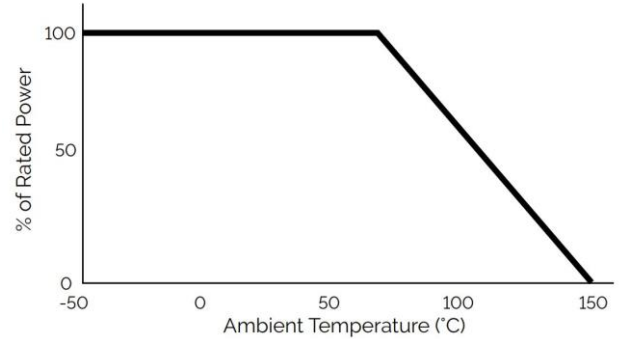

Testing

Testing Performed	Specification / Standard
Visual Inspection	MIL-PRF-55342 MIL-STD-883
Mechanical Inspection	MIL-PRF-55342
DC Resistance	MIL-PRF-55342 MIL-STD-202
Resistance Temperature Characteristics (TCR)	MIL-PRF-55342
Short Time Overload	MIL-PRF-55342
High Temperature Exposure	MIL-PRF-55342
Thermal Shock	MIL-PRF-55342 MIL-STD-202
Resistance to Bonding Exposure	MIL-PRF-55342
Wire Bonding Integrity	MIL-PRF-55342
Life Test	MIL-PRF-55342 MIL-STD-202

Performance Specifications

Higher power ratings, additional sizes, and custom resistors available. Please contact sales@passiveplus.com.