



Air Tubular Trimmer

PPI-60-0420-10003-000

PART SPECIFICATIONS

TUNING TORQUE	0.28 - 2.8 in. oz
STOP TORQUE	max. 3.54 in. oz
ROTATIONAL LIFE	≥ 75 cycles, IEC 418
VIBRATION	60 g / 10-2000Hz
SHOCK	1500g / 0.5ms
OPERATING TEMPERATURE	-65°C....+125°C
ADJUSTMENT ACCURACY	≤ 1 x 10 ⁻³ of adjusted value
CONTACT RESISTANCE	< 0.001 Ω
DIELECTRIC	Air

STANDARD CONFIGURATIONS

Part - No.	C _{min}	C _{max}	Test Voltage (VDC)	Q-Factor (@ 200MHz)	IR (MΩ)	TC (ppm/°C)	Dim. A (mm)	Weight (g)
PPI-60-0420-10003-000	0.3	3.5	250	>5000	>10 ⁶	50 ± 15	5.2	1.0

Special Configurations (on inquiry)


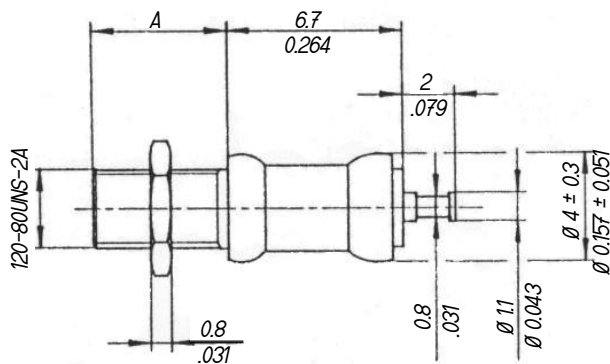


Figure A

Order #: PPI-60-0420....-030
Sealcap Unmounted

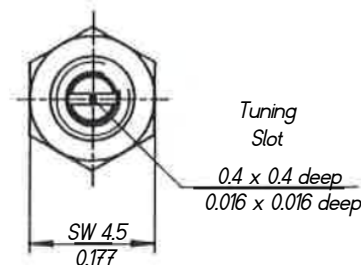

Optional Hardware

Figure B

Order #: PPI-60-0420....-019
Slotted Sealcap Unmounted







Figure C

Order #: PPI-60-0420....-014
Slotted Nut Unmounted



Dimensions are in mm
inches