





Air Tubular Trimmer

PPI-60-1004-25010-000


PART SPECIFICATIONS

Tuning Torque	0.90 – 5.8 in. oz.	Rotational Life	≥ 75 cycles, IEC 418
Stop Torque	max 11.1 in. oz.	Vibration	60g / 10 – 2000Hz
Mounting Torque	Max 105 in. oz.	Shock	1500g / 0.5 ms
Adjustment Accuracy	≤1 x 10 ⁻³ of adjusted value	Operating Temperature	-65°C...+125°C
Contact Resistance	< 0.001Ω	Dielectric	Air

Part Number	Cmin (pF)	Cmax (pF)	Test Voltage (VDC)	Q Factor @200 MHz	R _{insul.} (MΩ)	TC (ppm/°C)	Dim A (mm)	Dim B (mm)	Weight (g)
PPI-60-1004-25010-000	1.0	10.0	1000	>1000	>10 ⁶	50 ± 15	6.5	---	5.2

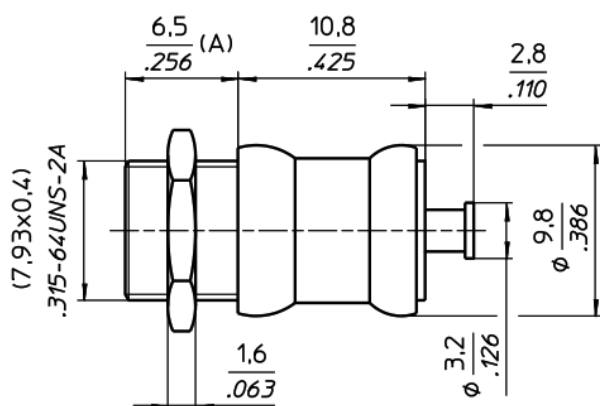


Tuning Slot
0.60 wide x 5.80
0.24 wide x 0.23

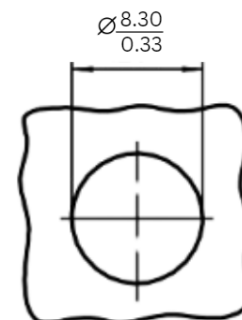


Mounting Layout

Optional Hardware

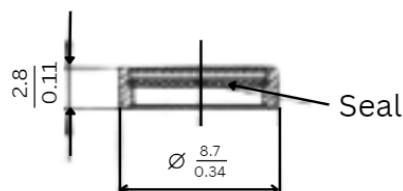

Dim A: + 0.6
+0.24

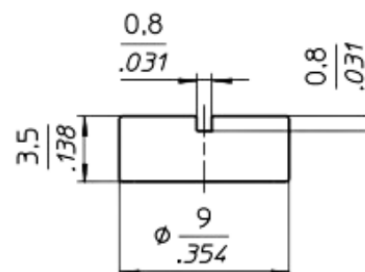

Slotted Seal Cap: A+ 1.40
0.55

Dimensions are in $\frac{\text{mm}}{\text{inches}}$