



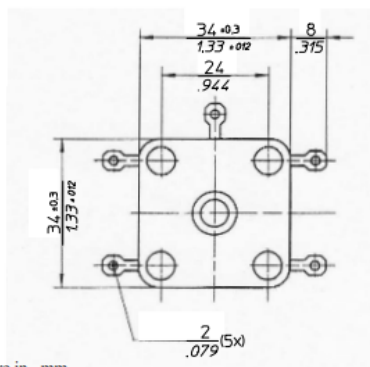

PART SPECIFICATIONS


TUNING TORQUE	4.1 - 14 in. oz
MOUNTING TORQUE	max. 70 in. oz.
CERAMIC	DIN 40685 / 221
DIELECTRIC	Air
ROTOR	Brass plates soldered into slotted brass shaft. Assembly gold plated
STATOR	Brass plates soldered into 2 slotted brass shafts. Assembly gold plated

Part Number	Cmin (pF)	Cmax (pF)	Air Gap (mm)	Working Voltage (VDC)	Weight (g)
PPI-10-3412-95026-901	11	26	2.15	3500	134

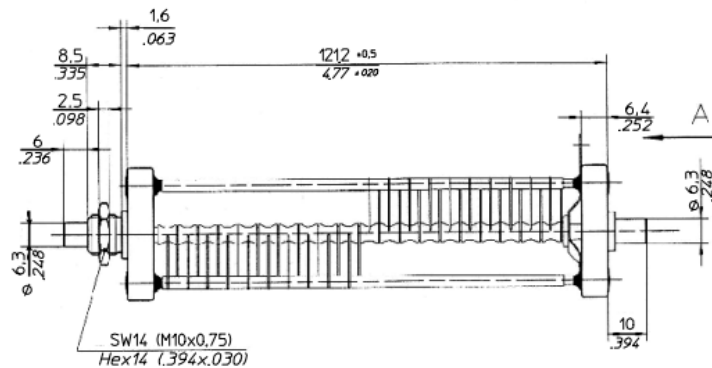

Dimensions are in $\frac{\text{mm}}{\text{inches}}$

Mounting layout

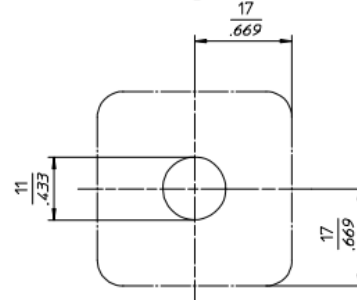

SPECIAL CONFIGURATIONS: Air gap 2.15mm, Capacity 2 x 26 pF

Please note that the contents of this document are subject to change at any time at PPI's sole discretion. The most up-to-date version of this document is available at www.passiveplus.com