







Air Tubular Trimmer

PPI-60-0714-1001x-000

PART SPECIFICATIONS

Torque	0.7 – 3.6 in. oz.	Rotational Life	≥ 75 cycles, IEC 418
Stop Torque	max 8 in. oz.	Vibration	60g / 10 – 2000Hz
Mounting Torque	max. 42 in. oz.	Shock	1500g / 0.5 ms
Adjustment Accuracy	≤ 1 x 10 ⁻³ of adjusted value	Operating Temperature	-65°C...+125°C
Contact Resistance	< 0.001Ω	Dielectric	Air

Part Number	Cmin (pF)	Cmax (pF)	Test Voltage (VDC)	Q Factor @200 MHz	R _{insul.} (MΩ)	TC (ppm/°C)	Weight (g)
PPI-60-0714-10011-000	1.1	11.0	250	>5000	>10 ⁶	65 ± 30	2.1
PPI-60-0714-10016-000	1.1	16.0	250	>5000	>10 ⁶	65 ± 30	2.1

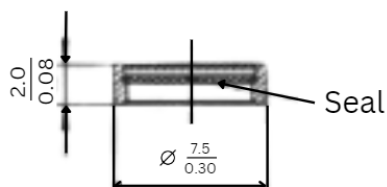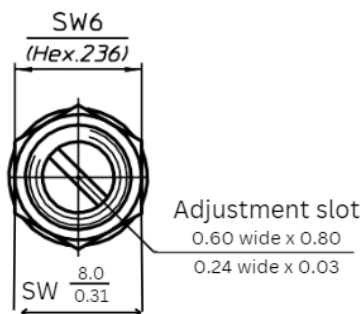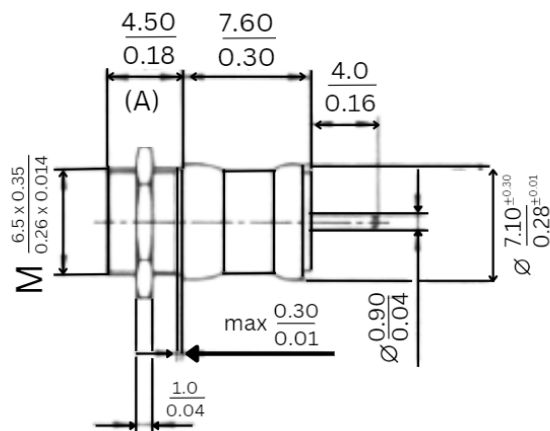

Dimensions are in $\frac{\text{mm}}{\text{inches}}$