

PART SPECIFICATIONS

TUNING TORQUE	0.9 - 5.0 in. oz
STOP TORQUE	11.1 in. oz
ROTATIONAL LIFE	≥ 75 cycles, IEC 418
VIBRATION	60 g / 10-2000Hz
SHOCK	1500g / 0.5ms
OPERATING TEMPERATURE	-65°C....+125°C
ADJUSTMENT ACCURACY	≤ 1 x 10 ³ of adjusted value
CONTACT RESISTANCE	< 0.001 Ω
DIELECTRIC	Air

Part Number	Cmin (pF)	Cmax (pF)	Working Voltage (VDC)	Q-Factor (@200MHz)	IR (MΩ)	TC (ppm/°C)	Dim. A (mm)	Dim. B (mm)	Weight (g)	Optional Hardware	Figure
PPI-60-0726-15014-000	1.1	14.0	300	>5000	>10 ⁶	0 ± 15	4.0	---	1.8	---	---
PPI-60-0726-15014-030	1.1	14.0	300	>5000	>10 ⁶	0 ± 15	4.0	---	1.8	with Seal Cap Unmounted	A
PPI-60-0726-15014-019	1.1	14.0	300	>5000	>10 ⁶	0 ± 15	4.0	---	1.8	with Slotted Seal Cap Unmounted	B

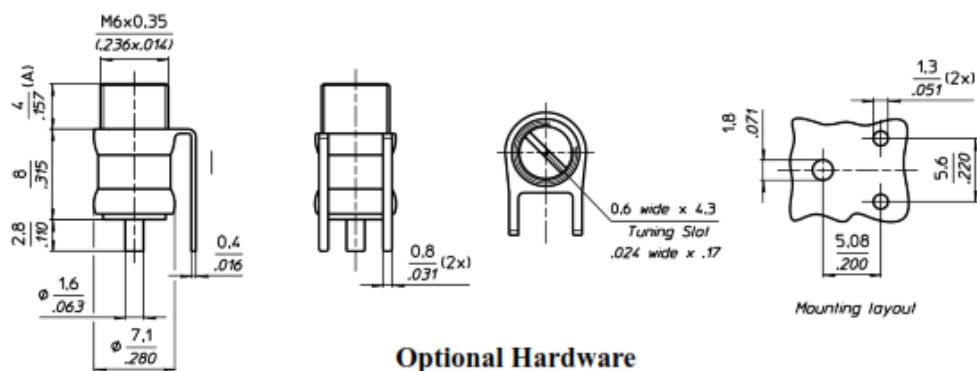


Figure A
Seal Cap Unmounted

Figure B
Slotted Seal Cap

SPECIAL CONFIGURATIONS available: e.g. Trimmer non-magnetic, extended shaft, high temperature solder

Dimensions are in $\frac{\text{mm}}{\text{inches}}$