


PART SPECIFICATIONS


TUNING TORQUE	0.9 - 5.0 in. oz.
ROTATIONAL LIFE	≥ 75 cycles, IEC 418
STOP TORQUE	max 11.1 in.oz.
VIBRATION	60g / 10-2000 Hz
MOUNTING TORQUE	max. -- in.oz
SHOCK	1500g / 0.5ms
ADJUSTMENT ACCURACY	≤ 1 x 10 ⁻³ of adjusted value
OPERATING TEMPERATURE	-65°C....+125°C
CONTACT RESISTANCE	< 0.001Ω
DIELECTRIC	Air

Part Number	Cmin (pF)	Cmax (pF)	Test Voltage (VDC)	Q-Factor (@200MHz)	IR (MΩ)	TC (ppm/°C)	Dim. A (mm)	Dim. B (mm)	Weight (g)	Optional Hardware	Figure
PPI-60-0748-15030-000	1.0	30.0	300	> 500	>10 ⁶	30 ± 20	--	--	3.6	---	---
PPI-60-0748-15030-030	1.0	30.0	300	> 500	>10 ⁶	30 ± 20	+0.5	--	3.6	with Sealcap Unmounted	A
PPI-60-0748-15030-019	1.0	30.0	300	> 500	>10 ⁶	30 ± 20	+1.4	--	3.6	with Slotted sealcap unmounted	B

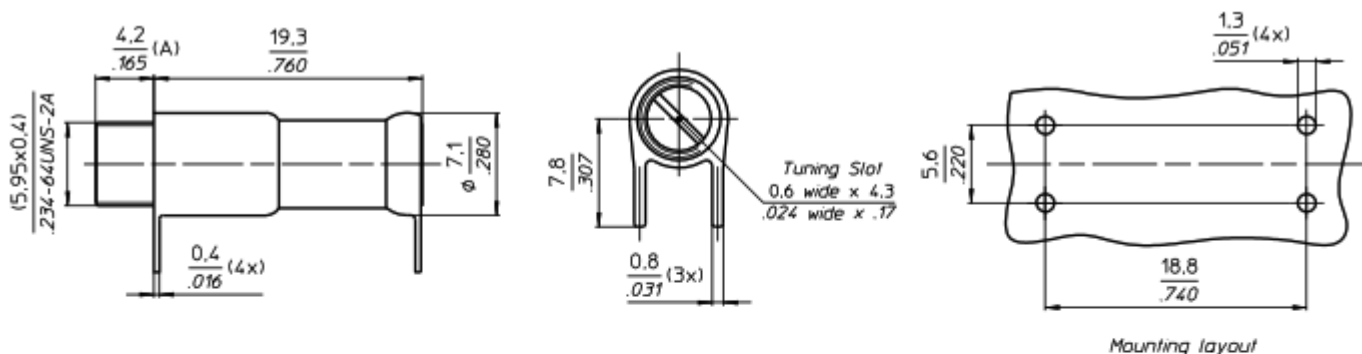


Optional Hardware

Figure A



Sealcap unmounted : Dim A $\begin{matrix} +0.5 \\ +.02 \end{matrix}$

Figure B



Slotted sealcap unmounted : Dim A $\begin{matrix} +1.4 \\ +.055 \end{matrix}$

Dimensions are in $\frac{\text{mm}}{\text{inches}}$