
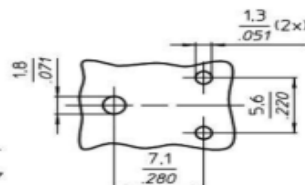



PART SPECIFICATIONS

TUNING TORQUE	0.9 - 5.0 in.oz
ROTATIONAL LIFE	≥ 75 cycles, IEC 418
STOP TORQUE	max 11.1 in.oz
VIBRATION	60 g / 10-2000Hz
MOUNTING TORQUE	----
SHOCK	1500g / 0.5ms
ADJUSTMENT ACCURACY	≤ 1 x 10 ³ of adjusted value
OPERATING TEMPERATURE	-65°C....+125°C
CONTACT RESISTANCE	< 0.001Ω
DIELECTRIC	Air

Part Number	Cmin (pF)	Cmax (pF)	Working Voltage (VDC)	Q-Factor (@200MHz)	IR (MΩ)	TC (ppm/°C)	Dim. A (mm)	Dim. B (mm)	Weight (g)	Optional Hardware	Figure
PPI-60-0750-15030-000	1.0	30.0	300	>500	>10 ⁶	30 ± 20	10.1	---	3.3	---	---
PPI-60-0750-15030-030	1.0	30.0	300	>500	>10 ⁶	30 ± 20	10.1	---	3.3	with Seal Cap Unmounted	A
PPI-60-0750-15030-019	1.0	30.0	300	>500	>10 ⁶	30 ± 20	10.1	---	3.3	with Slotted Seal Cap Unmounted	B

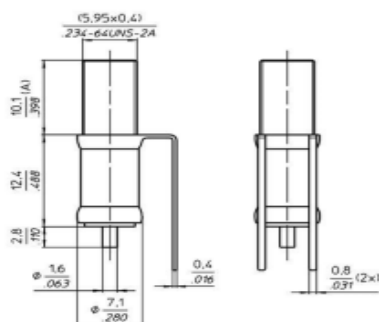

Mounting layout

Optional Hardware

Figure A
Seal Cap Unmounted





Figure B
Slotted Seal Cap
Unmounted



Dimensions are in $\frac{\text{mm}}{\text{inches}}$

Dimensions are in $\frac{\text{mm}}{\text{inches}}$