




Sapphire Trimmer

PPI-66-02x1-00001-000

PART SPECIFICATIONS

Tuning Torque	0.1 – 1.0 in. oz.	Rotational Life	≥ 75 cycles, IEC 418
Stop Torque	max 1.1 in. oz.	Vibration	60g / 10 – 2000Hz
Mounting Torque	----	Shock	1500g / 0.5 ms
Adjustment Accuracy	≤ 1 x 10 ⁻³ of adjusted value	Operating Temperature	-65°C...+125°C
Contact Resistance	< 0.001Ω	Dielectric	Sapphire

Part Number	Cmin (pF)	Cmax (pF)	Test Voltage (VDC)	Q Factor @200 MHz	R _{insul.} (MΩ)	TC (ppm/°C)	Dim A (mm)	Dim B (mm)	Weight (g)
PPI-66-0201-00001-000	0.3	1.2	1000	>5000	>10 ⁶	0 ± 50	---	---	0.15
PPI-66-0231-00001-000	0.3	1.2	1000	>5000	>10 ⁶	350 ± 75	---	---	0.15

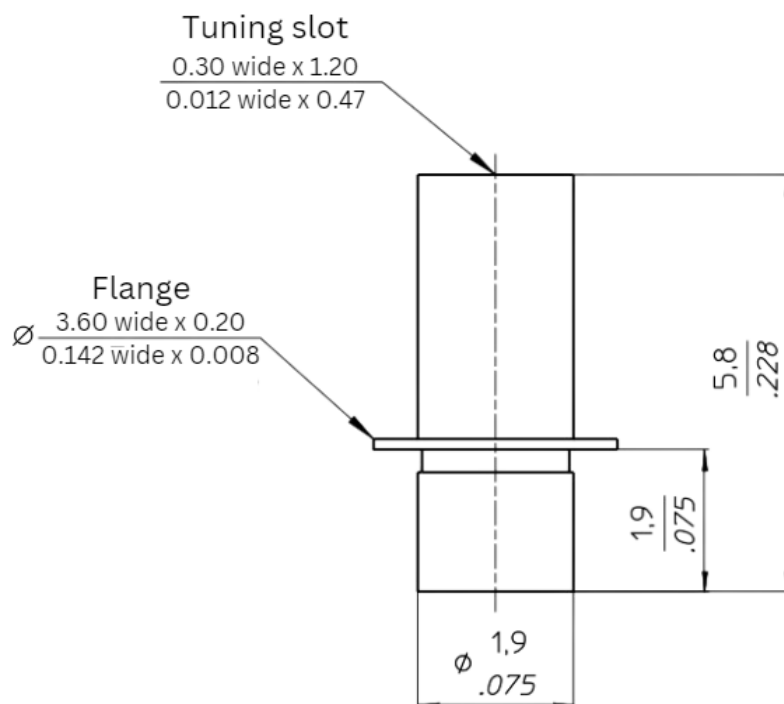

Dimensions are in $\frac{\text{mm}}{\text{inches}}$