


STANDARD CONFIGURATIONS

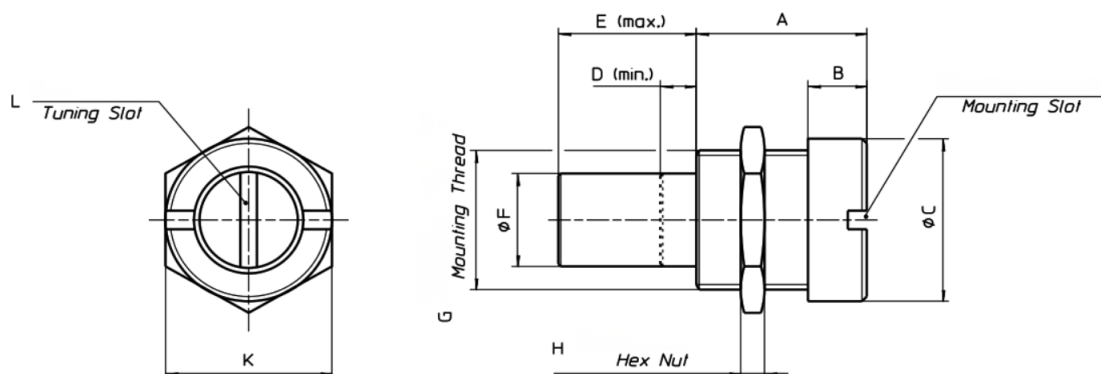


PART SPECIFICATIONS

2xx-xxxx-xxx = Brass 5xx-xxxx-xxx = Invar

Part Number	A mm	B mm	øC mm	D mm	E mm	øF mm	G Thread	H mm	W x DP I mm	SW HEX mm	Mounting Torque max Ncm	W x DP L mm	Tuning Torque Ncm
PPI-203-0301-100	3.1	0.9	3.4	0.9	1.9	1.8	.120-80UNS	0.8	--	4	10	0.4 x 0.5	0.1-1.0
PPI-203-0302-100	3.1	0.9	3.4	0	0.8	1.8	.120-80UNS	0.8	--	4	10	0.4 x 0.5	0.1-1.0
PPI-203-0303-100	3.1	0.9	3.4	0.9	1.9	1.8	.120-80UNS	0.8	0.6 x 0.6	4	10	0.4 x 0.5	0.1-1.0
PPI-203-0304-100	3.1	0.9	3.4	0	0.8	1.8	.120-80UNS	0.8	0.6 x 0.6	4	10	0.4 x 0.5	0.1-1.0
PPI-203-0600-100	6.0	0.9	3.4	0	3.8	1.8	.120-80UNS	0.8	--	4	10	0.4 x 0.5	0.1-1.0
PPI-203-0601-100	6.0	0.9	3.4	0	1.9	1.8	.120-80UNS	0.8	--	4	10	0.4 x 0.5	0.1-1.0
PPI-203-0603-100	6.0	0.9	3.4	3.6	4.7	1.8	.120-80UNS	0.8	--	4	10	0.4 x 0.5	0.1-1.0
PPI-203-0604-100	6.0	0.9	3.4	0	3.8	1.8	.120-80UNS	0.8	0.6 x 0.6	4	10	0.4 x 0.5	0.1-1.0
PPI-203-0605-100	6.0	0.9	3.4	0	1.9	1.8	.120-80UNS	0.8	0.6 x 0.6	4	10	0.4 x 0.5	0.1-1.0
PPI-203-0606-100	6.0	0.9	3.4	3.6	4.7	1.8	.120-80UNS	0.8	0.6 x 0.6	4	10	0.4 x 0.5	0.1-1.0
PPI-205-0300-100	3.2	0.9	5.3	0	0.6	3.2	.190-64UNS	1.0	0.8 x 0.6	5.5	30	0.6 x 0.4	0.3-3.0
PPI-205-0301-100	3.2	0.9	5.3	0	0.6	3.2	.190-64UNS	1.0	--	5.5	30	0.6 x 0.4	0.3-3.0
PPI-205-0302-100	3.2	0.9	5.3	3.2	3.6	3.2	.190-64UNS	1.0	0.8 x 0.6	5.5	30	0.6 x 0.4	0.3-3.0
PPI-205-0303-100	3.2	0.9	5.3	1.4	1.8	3.2	.190-64UNS	1.0	0.8 x 0.6	5.5	30	0.6 x 0.4	0.3-3.0
PPI-205-0400-100	4.3	1.1	5.3	0.2	1.7	3.2	.190-64UNS	1.0	--	5.5	30	0.6 x 0.4	0.3-3.0
PPI-205-0602-100	6.4	1	5.3	0	3.8	3.2	.190-64UNS	1.0	--	5.5	30	0.6 x 0.4	0.3-3.0
PPI-205-0603-100	6.4	1	5.3	0	3.8	3.2	.190-64UNS	1.0	0.8 x 0.6	5.5	30	0.6 x 0.4	0.3-3.0
PPI-205-0604-100	6.4	1	5.3	1.1	3.8	3.2	.190-64UNS	1.0	--	5.5	30	0.6 x 0.4	0.3-3.0
PPI-205-0605-100	6.4	1	5.3	0	3.2	1.6	.190-64UNS	1.0	--	5.5	30	0.6 x 0.4	0.3-3.0
PPI-205-0606-100	6.4	1	5.3	3.3	7.1	3.2	.190-64UNS	1.0	--	5.5	30	0.6 x 0.4	0.3-3.0
PPI-205-0800-100	7.6	1.1	5.3	0	2.3	3.2	.190-64UNS	1.0	--	5.5	30	0.6 x 0.4	0.3-3.0
PPI-205-0901-100	9.4	3.4	5.3	0.3	6.8	3.2	.190-64UNS	1.0	0.8 x 0.6	5.5	30	0.6 x 0.4	0.3-3.0
PPI-205-1400-100	14.0	1	5.3	0	11.4	3.2	.190-64UNS	1.0	0.8 x 0.6	5.5	30	0.6 x 0.4	0.3-3.0

Please note that the contents of this document are subject to change at any time at PPI's sole discretion. The most up-to-date version of this document is available at www.passiveplus.com.

STANDARD CONFIGURATIONS

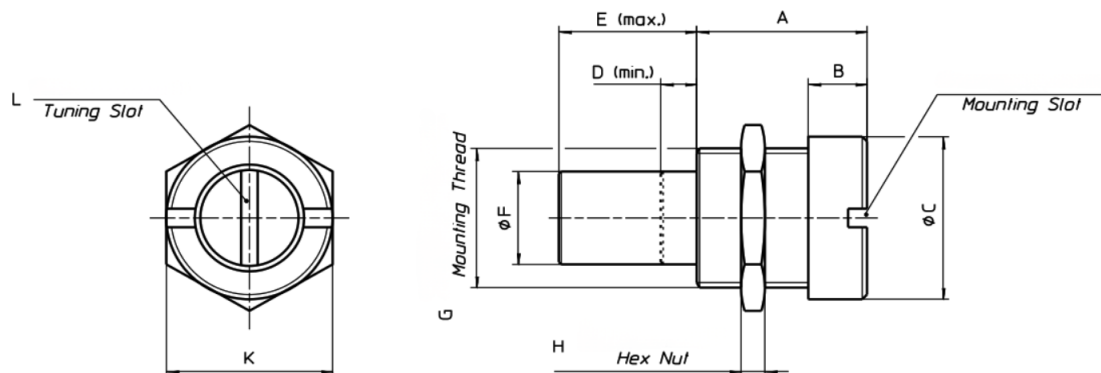

PART SPECIFICATIONS

2xx-xxxx-xxx = Brass 5xx-xxxx-xxx = Invar

Part Number	A mm	B mm	øC mm	D mm	E mm	øF mm	G Thread	H mm	W x DP I mm	SW HEX mm	Mounting Torque max Ncm	W x DP L mm	Tuning Torque Ncm
PPI-207-0300-100	3.2	0.8	6.8	0	0.7	4	.234-64UNS	1	--	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0301-100	3.3	0.9	6.8	0	0.6	4	.234-64UNS	1	--	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0500-100	5.3	0.7	6.8	0	2.7	4	.234-64UNS	1	--	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0501-100	4.7	0.7	6.8	0	2.1	4	.234-64UNS	1	--	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0504-100	5.3	0.7	6.8	0	2.7	4	.234-64UNS	1	0.8 x 0.6	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0505-100	5.3	0.7	6.8	1.9	2.7	4	.234-64UNS	1	--	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0506-100	5.3	0.7	6.8	1.9	2.7	4	.234-64UNS	1	0.8 x 0.6	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0507-100	5.3	0.9	6.8	0	2.7	4	.234-64UNS	1	0.8 x 0.6	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0508-100	4.7	0.7	6.8	0.5	2.2	4	.234-64UNS	1	--	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0509-100	5.3	0.7	6.8	6.1	8.8	4	.234-64UNS	1	--	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0510-100	4.7	0.7	6.8	0.6	2.7	4	.234-64UNS	1	--	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0511-100	5.3	0.9	6.8	1.9	4.6	4	.234-64UNS	1	0.8 x 0.6	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0518-100	4.7	0.7	6.8	0.6	2.7	4	.234-64UNS	1	0.8 x 0.6	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0519-100	5.3	0.7	6.8	6.1	8.8	4	.234-64UNS	1	0.8 x 0.6	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0900-100	9.1	3.6	6.8	0	6.5	4	.234-64UNS	1	--	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0901-100	9.1	3.6	6.8	0	6.5	4	.234-64UNS	1	0.8 x 0.6	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0904-100	9.1	3.6	6.8	2.3	6.5	4	.234-64UNS	1	--	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0905-100	9.1	3.6	6.8	0	2.7	4	.234-64UNS	1	--	7	50	0.6 x 0.5	0.7-3.6
PPI-207-0506-100	9.1	3.6	6.8	0	4.6	4	.234-64UNS	1	--	7	50	0.6 x 0.5	0.7-3.6
PPI-207-1100-100	11.5	6.1	6.8	0	8.8	4	.234-64UNS	1	--	7	50	0.6 x 0.5	0.7-3.6
PPI-207-1101-100	11.5	6.1	6.8	0	8.6	4	.234-64UNS	1	--	7	50	0.6 x 0.5	0.7-3.6
PPI-207-1105-100	11.5	6.1	6.8	0	8.8	4	.234-64UNS	1	0.8 x 0.6	7	50	0.6 x 0.5	0.7-3.6
PPI-207-1202-100	11.5	6.1	6.8	2.6	11.4	4	.234-64UNS	1	0.8 x 0.6	7	50	0.6 x 0.5	0.7-3.6
PPI-209-0900-100	9.1	1	9.5	0	6	5.3	.312-64UNS	1.6	--	10	75	0.6 x 0.7	0.7-4.2
PPI-209-0901-100	9.1	1	9.5	0	6	5.3	.312-64UNS	1.6	0.8 x 0.6	10	75	0.6 x 0.5	0.7-4.2
PPI-213-1800-100	18.3	1	13.5	0	12.6	8.8	.469-32UNS	2.5	--	14	180	0.8 x 0.9	1.5-3.5
PPI-507-0500-100	5.3	0.7	6.8	0.2	2.9	3.9	.234-64UNS	1	--	7	50	0.6 x 0.8	0.7-3.6
PPI-507-0900-100	9.1	3.6	6.8	0.3	6.5	3.9	.234-64UNS	1	0.8 x 0.6	7	50	0.6 x 0.8	0.7-3.6

Please note that the contents of this document are subject to change at any time at PPI's sole discretion. The most up-to-date version of this document is available at www.passiveplus.com.