


# BROADBAND CAPACITORS CROSS REFERENCE CHART

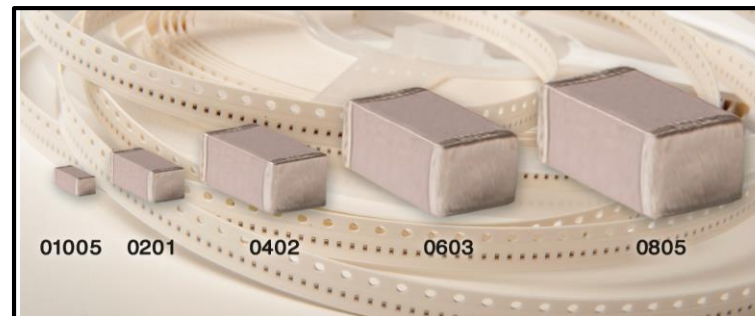

Case Size	Passive Plus Part Number	AVX / ATC		Frequency Range	IL	WVDC	Size (inches)	Value
01005BB	01005BB104MW4R0	N/A	N/A	16kHz>67GHz	<1dB	4V	.010 x .005	100,000pF (100nF)
	01005BB104MW6R3	N/A	N/A	16kHz>67GHz	<1dB	6.3V	.010 x .005	100,000pF (100nF)
0201BB	0201BB103KW250**	GX01	550Z /10V	160kHz>32GHz	<1dB	25V	.020 X .010	10,000pF (10nF)
	0201BB104KW160**	N/A	530Z /10V	16kHz>40GHz	<1dB	16V	.020 x .010	100,000pF (100nF)
0402BB	0402BB103KW160	N/A	520L /16V	160kHz>16.5GHz	<1dB	16V	.040 x .020	10,000pF (10nF)
	0402BB103KW500	N/A	N/A	160kHz>40GHz	<1dB	50V	.040 x .020	10,000pF (10nF)
	0402BB104KW160	N/A	530L /16V	16kHz>18GHz	<1dB	16V	.040 x .020	100,000pF (100nF)
	0402BB104KW500**	GX02	560L /16V 550L/16V	16kHz>50GHz	<1.2dB	50V	.040 x .020	100,000pF (100nF)
0603BB	0603BB104KW101**	GX03	550S	16kHz > 20GHz	<1.2dB	100V	.060 x .030	100,000pF (100nF)
0805BB	0805BB103KW101**	N/A	N/A	160kHz >3GHz	<.25dB	100V	.080 x .050	10,000pF (10nF)

\*\* Available in both RoHS and Gold Terminations; Tin/Lead Termination is also available on the 0201BB, 0402BB, 0603BB, and 0805BB case sizes.

See catalog and website for complete Broadband Series specifications.

PIIBBCROSS073021RevA