




Non-Magnetic Inserts

Threaded Insert with Knurl

PART SPECIFICATIONS

Material: Non-Magnetic Brass
with Diagonal Knurl and Undercuts

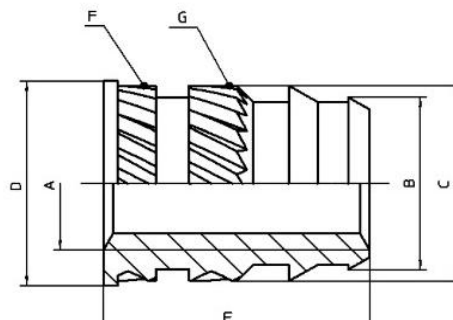

Long



Short

Part Number	Inside Thread A mm	Diameter B mm	Knurl Diameter C mm	Shoulder Diameter D mm	Length E mm	Knurl	
						F	G
PPI-520-0168	4-40UNC	4	4.2	4.4	3.4 (short)	RBR	RBR
PPI-520-0169	4-40UNC	3.7	4.2	4.4	5.6 (long)	RBR	RBR
PPI-510-0161	6-32UNC	4.8	5.5	5.6	6.4 (long)	RBR	RBR
PPI-510-9556	8-32UNC	5.8	6.2	6.4	4.7 (short)	RBR	RBR
PPI-510-0162	8-32UNC	5.4	6.3	6.4	7.9 (long)	RBR	RBR
PPI-520-0170	10-24UNC	6.9	7.4	7.5	5.7 (short)	RBR	RBR
PPI-510-0299	10-24UNC	6.4	7.4	7.5	9.5 (long)	RBR	RBR
PPI-510-0163	10-32UNC	6.4	7.4	7.5	9.5 (long)	RBR	RBR
PPI-510-9750	.250-20UNS	8.4	9.2	9.5	12.7 (long)	RBR	RBR
PPI-520-0486	M2	3.3	3.6	--	3 (short)	RBL	RBR
PPI-510-0300	M2.5	3.7	4.2	4.4	5.6 (long)	RBR	RBR
PPI-510-0304	M3	5.2	5.5	5.6	3.8 (short)	RBR	RBR
PPI-510-7990	M3	3.9	4.6	--	5.0 (short)	RBL	RBR
PPI-510-3038	M3	3.9	4.5	5.6	6.3 (short)	RBR	RBL
PPI-510-0301	M3	4.8	5.5	5.6	6.4 (long)	RBR	RBR
PPI-510-0302	M3.5x0.6	4.8	5.5	5.6	6.4 (long)	RBR	RBR
PPI-510-0303	M4	5.8	6.3	6.4	4.7 (short)	RBR	RBR
PPI-510-2945	M4	5.6	6.1	7.2	5.6 (short)	RBR	RBL
PPI-510-7989	M4	5.6	6.3	8	6.0 (short)	RBL	RBR
PPI-510-0164	M4	5.4	6.3	6.4	7.9 (long)	RBR	RBR
PPI-510-0165	M5	7.8	8.2	8.3	6.7 (short)	RBR	RBR
PPI-510-0166	M5	7.2	8.2	8.3	11.1 (long)	RBR	RBR
PPI-520-3005	M6	9	9.4	9.5	7.6 (short)	RBR	RBR
PPI-520-0149	M6	8.4	9.4	9.5	12.7 (long)	RBR	RBR
PPI-520-0150	M6	10.3	11.7	11.9	14.3 (long)	RBR	RBR

Please note that the contents of this document are subject to change at any time at PPI's sole discretion. The most up-to-date version of this document is available at www.passiveplus.com.