


BROADBAND CAPACITORS CROSS REFERENCE CHART

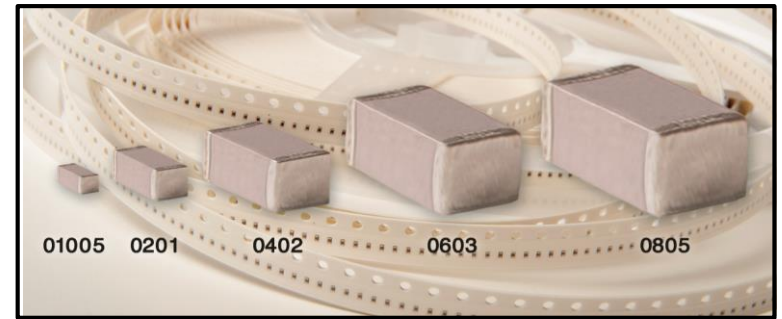

Case Size	Passive Plus	AVX / ATC		Frequency Range	I.L.	WVDC	Size (inches)
01005BB	01005BB104MW4R0	N/A	N/A	16kHz - >67GHz	<1dB	4V	.010 x .005
	01005BB104MW6R3	N/A	N/A	16kHz - >67GHz	<1dB	6.3V	.010 x .005
0201BB	0201BB103KW250**	GX01	550Z /10V	160kHz - >32GHz	<1dB	25V	.020 X .010
	0201BB104KW160**	N/A	530Z /10V	16kHz - >40GHz	<1dB	16V	.020 x .010
0402BB	0402BB103KW160	N/A	520L /16V	160kHz - >16.5GHz	<1dB	16V	.040 x .020
	0402BB103KW500	N/A	N/A	160kHz - >40GHz	<1dB	50V	.040 x .020
	0402BB104KW160	N/A	530L /16V	16kHz - >18GHz	<1dB	16V	.040 x .020
	0402BB104KW500**	GX02	560L /16V 550L/16V	16kHz - >50GHz	<1.2dB	50V	.040 x .020
0603BB	0603BB104KW101**	GX03	550S	16kHz - >20GHz	<1.2dB	100V	.060 x .030
0805BB	0805BB103KW101**	N/A	N/A	160kHz - >3GHz	<.25dB	100V	.080 x .050

** Available in both RoHS and Gold Terminations; Tin/Lead Termination is also available on the 0201BB, 0402BB, 0603BB, and 0805BB case sizes.

See catalog and website for complete Broadband Series specifications.

PPIBCCROSS051722RevA